

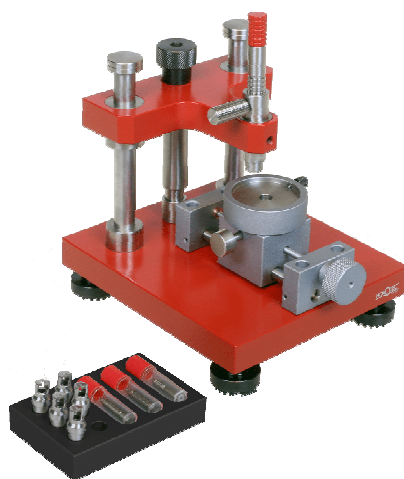
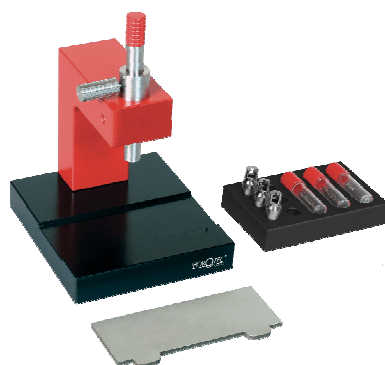


# 05

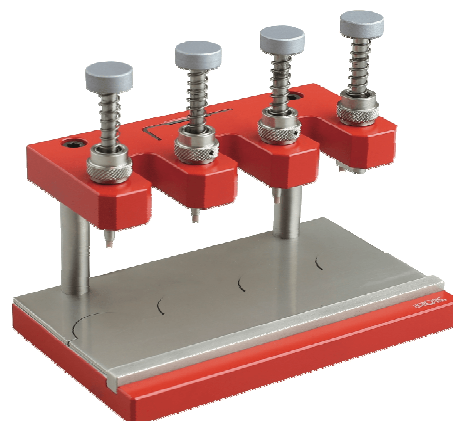

HANDS FITTING TOOLS

05 - 2

HANDS FITTING PRESSES

05 - 4

HANDS REMOVING PRESSES

05 - 9

HANDS REMOVING TOOLS

05 - 11



ASSORTMENT

| MSA    | Size             | Kg    |
|--------|------------------|-------|
| 05.023 | 132 x 63 x 30 mm | 0.107 |

Assortment of hands fitting tools equipped with Delrin® driven stakes. Knurled handle in anodised aluminium. Delivered in a wooden box.

**Contents :**

- 1x MSA05.011 Hands fitting tool, flat - Ø 0.80 mm
- 1x MSA05.010 Hands fitting tool, Ø 0.50 - 1.00 mm
- 1x MSA05.019 Hands fitting tool, Ø 0.65 - 1.10 mm
- 1x MSA05.012 Hands fitting tool, Ø 1.50 - 2.00 mm



ASSORTMENT

| MSA    | Kg    |
|--------|-------|
| 05.020 | 0.035 |

Assortment of hands fitting tools, equipped with Delrin® driven stakes. Knurled handle in anodised aluminium. Delivered in 1 plastic pouch.

**Contents :**

- 1x MSA05.011 Hands fitting tool, flat - Ø 0.80 mm
- 1x MSA05.010 Hands fitting tool, Ø 0.50 - 1.00 mm
- 1x MSA05.019 Hands fitting tool, Ø 0.65 - 1.10 mm
- 1x MSA05.012 Hands fitting tool, Ø 1.50 - 2.00 mm



- Ø 0.80 mm

| MSA    | Length | Kg    |
|--------|--------|-------|
| 05.011 | 112 mm | 0.010 |

Hands fitting tool with Delrin® driven stakes. Knurled handle in anodised aluminium.

**Spare parts :**

| MSA      | Item                 | Kg    |
|----------|----------------------|-------|
| 05.011-A | Flat stake           | 0.001 |
| 05.011-B | Stake Ø hole 0.80 mm | 0.001 |



Ø 1.00 mm Ø 0.50 mm

| MSA    | Length | Kg    |
|--------|--------|-------|
| 05.010 | 112 mm | 0.010 |

Hands fitting tool with Delrin® driven stakes. Knurled handle in anodised aluminium.

**Spare parts :**

| MSA      | Item                 | Kg    |
|----------|----------------------|-------|
| 05.010-A | Stake Ø hole 0.50 mm | 0.001 |
| 05.010-B | Stake Ø hole 1.00 mm | 0.001 |



Ø 0.65 mm

Ø 1.10 mm

| MSA    | Length | Kg    |
|--------|--------|-------|
| 05.019 | 112 mm | 0.010 |

Hands fitting tool with Delrin® driven stakes.  
Knurled handle in anodised aluminium.

**Spare parts :**

| MSA      | Item                 | Kg    |  |
|----------|----------------------|-------|--|
| 05.019-A | Stake Ø hole 0.65 mm | 0.001 |  |
| 05.019-B | Stake Ø hole 1.10 mm | 0.001 |  |



Ø 1.50 mm


Ø 2.00 mm

| MSA    | Length | Kg    |
|--------|--------|-------|
| 05.012 | 112 mm | 0.010 |

Hands fitting tool with Delrin® driven stakes.  
Knurled handle in anodised aluminium.

**Spare parts :**

| MSA      | Item                 | Kg    |  |
|----------|----------------------|-------|--|
| 05.012-A | Stake Ø hole 1.50 mm | 0.001 |  |
| 05.012-B | Stake Ø hole 2.00 mm | 0.001 |  |

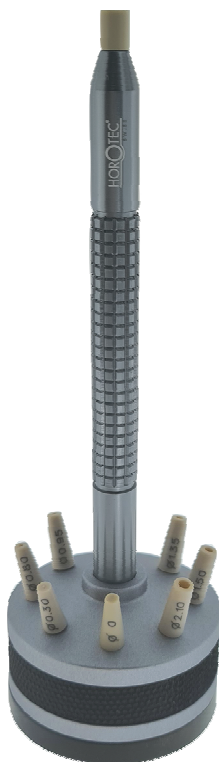

| MSA    | Kg    |
|--------|-------|
| 05.031 | 0.155 |

Hands fitting tool on a rotating base.  
Delivered with 8 PEEK tips and 1 protective cap.

*PEEK (polyetheretherketone phenylene) is a polymer with different properties and high performance used, among others, in the aerospace industry.*

- Very good resistance to solvents
- Stability over time
- Doesn't mark the parts.

**Spare parts :**

| MSA         | Item                                 | Kg    |  |
|-------------|--------------------------------------|-------|--|
| 05.031-0    | PEEK flat tip, Ø ext. 2.00 mm        | 0.001 |  |
| 05.031-0.30 | PEEK tip Ø int. 0.30, Ø ext. 2.50 mm | 0.001 |  |
| 05.031-0.80 | PEEK tip Ø int. 0.80, Ø ext. 2.60 mm | 0.001 |  |
| 05.031-0.95 | PEEK tip Ø int. 0.95, Ø ext. 2.80 mm | 0.001 |  |
| 05.031-1.10 | PEEK tip Ø int. 1.10, Ø ext. 2.90 mm | 0.001 |  |
| 05.031-1.35 | PEEK tip Ø int. 1.35, Ø ext. 3.00 mm | 0.001 |  |
| 05.031-1.50 | PEEK tip Ø int. 1.50, Ø ext. 3.20 mm | 0.001 |  |
| 05.031-2.10 | PEEK tip Ø int. 2.10, Ø ext. 3.50 mm | 0.001 |  |
| 05.031-E    | PEEK protective cap                  | 0.001 |  |
| 05.031-M    | (1) Handle                           | 0.024 |  |
| 05.031-S    | Rotating base                        | 0.098 |  |

Fitting watch hands, without damaging the dial and the hands are delicate operations that guarantee the aesthetics of the watch.  
An ideal hands press for any after-sales service jobs.




| MSA    | Size            | Kg    |
|--------|-----------------|-------|
| 05.021 | 70 x 70 x 65 mm | 0.400 |

Hands fitting press for wrist and pocket watches, for a quick and efficient job. It allows a precise control by holding the die vertically while pressing on the hand. Nice finish in steel and aluminium.  
*Delivered with 8 Delrin® screw-on stakes.*

Spare parts :

| MSA       | Item            | Kg    |
|-----------|-----------------|-------|
| 05.017-01 | (1) Broach      | 0.009 |
| 05.017-02 | Spring          | 0.002 |
| 05.017-A  | Stake Ø 0.50 mm | 0.002 |
| 05.017-B  | Stake Ø 0.70 mm | 0.002 |
| 05.017-C  | Stake Ø 0.90 mm | 0.002 |
| 05.017-D  | Stake Ø 1.20 mm | 0.002 |
| 05.017-E  | Stake Ø 1.50 mm | 0.002 |
| 05.017-F  | Stake Ø 1.70 mm | 0.002 |
| 05.017-G  | Flat stake      | 0.002 |
| 05.017-H  | Conical stake   | 0.002 |

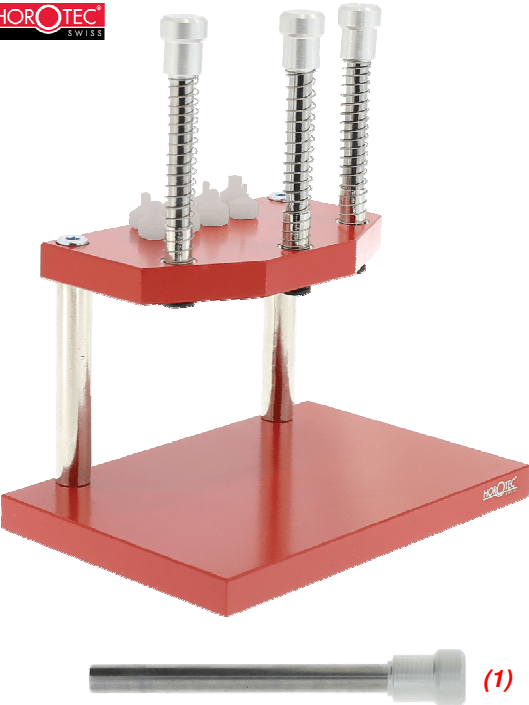


| MSA    | Size             | Kg    |
|--------|------------------|-------|
| 05.022 | 105 x 70 x 72 mm | 0.520 |

Hands fitting press with 3 broaches for wrist and pocket watches without any broach replacement.  
*Delivered with 8 Delrin® screw-on stakes.*

Spare parts :

| MSA       | Item            | Kg    |
|-----------|-----------------|-------|
| 05.017-01 | (1) Broach      | 0.009 |
| 05.017-02 | Spring          | 0.002 |
| 05.017-A  | Stake Ø 0.50 mm | 0.002 |
| 05.017-B  | Stake Ø 0.70 mm | 0.002 |
| 05.017-C  | Stake Ø 0.90 mm | 0.002 |
| 05.017-D  | Stake Ø 1.20 mm | 0.002 |
| 05.017-E  | Stake Ø 1.50 mm | 0.002 |
| 05.017-F  | Stake Ø 1.70 mm | 0.002 |
| 05.017-G  | Flat stake      | 0.002 |
| 05.017-H  | Conical stake   | 0.002 |




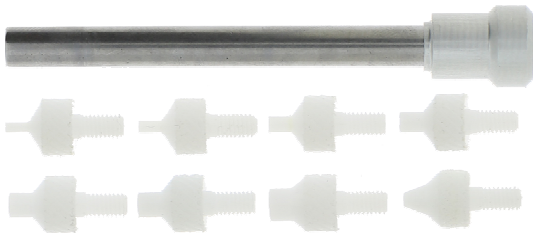

ASSORTMENT

| MSA       | Kg    |
|-----------|-------|
| 05.017-03 | 0.026 |

Assortment with 1 broach and 8 Delrin® screw-on stakes for presses MSA05.021 and MSA05.022.

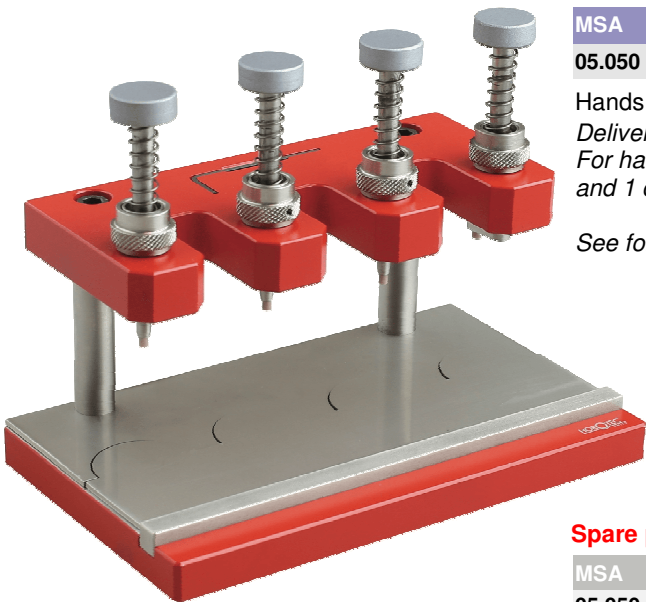

| MSA    | Size               | Kg    |
|--------|--------------------|-------|
| 05.050 | 160 x 100 x 130 mm | 1.440 |

Hands fitting press, 4 broaches.  
 Delivered with stakes equipped with PEEK tips (doesn't mark the hands).  
 For hands : hours (Ø 1.35 mm), minutes (Ø 0.95 mm), seconds (Ø 0.30 mm) and 1 decentred stake.

See following pages for other compatible stakes.

Spare parts :

| MSA       | Item                   | Kg    |
|-----------|------------------------|-------|
| 05.050-BA | Adjustable stop ringDE | 0.010 |
| 05.050-BR | Broach with head       | 0.018 |
| 05.050-RE | Spring for broach      | 0.002 |

Accessory :

| MSA      | Item                                                   | Kg    |
|----------|--------------------------------------------------------|-------|
| 05.050-P | Decentred adaptor for movement holder.<br>Base Ø 31 mm | 0.105 |



HANDS FITTING PRESSES

High precision hands fitting press with revolving head to avoid changing broaches, ideal for production series. Each broach is equipped with a knurled ring for fine height adjustment. Suitable for movement holder MSA09.010-xx Ø 31 mm (see chapter 09).



| MSA    | Tips  | Use           | Kg    |
|--------|-------|---------------|-------|
| 05.109 | Steel | For H/M hands | 1.350 |
| 05.114 | PEEK  | For H/M hands | 1.350 |

High precision hand fitting press, with 2 hardened steel broaches and 2 stakes Ø 1.35 - 0.95 mm.



| MSA    | Tips  | Use             | Kg    |
|--------|-------|-----------------|-------|
| 05.110 | Steel | For H/M/S hands | 1.475 |
| 05.115 | PEEK  | For H/M/S hands | 1.475 |

High precision hand fitting press, with 3 hardened steel broaches and 3 stakes Ø 1.35 - 0.95 - 0.30 mm.



| MSA    | Tips  | Use                         | Kg    |
|--------|-------|-----------------------------|-------|
| 05.111 | Steel | For H/M/decentred Sec hands | 1.455 |
| 05.116 | PEEK  | For H/M/decentred Sec hands | 1.455 |


High precision hand fitting press, with 3 hardened steel broaches and 3 stakes Ø 1.35 - 0.95 mm - decentred.



| MSA    | Tips  | Use                  | Kg    |
|--------|-------|----------------------|-------|
| 05.112 | Steel | For H/M/S/Date hands | 1.585 |
| 05.117 | PEEK  | For H/M/S/Date hands | 1.585 |


High precision hand fitting press, with 4 hardened steel broaches and 4 stakes Ø 1.35 - 0.95 - 0.30 - 2.10 mm.

Accessories for use with the presses illustrated above.



| MSA      | Kg    |
|----------|-------|
| 05.015-R | 0.010 |

Table to set counter.


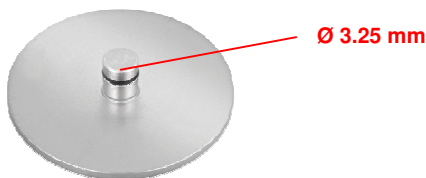


| MSA      | Kg    |
|----------|-------|
| 05.015-P | 0.010 |

Decentred adaptor for movement holder.


## Other accessories :

| MSA      | Item                          | Kg    |
|----------|-------------------------------|-------|
| 05.110-A | Stop ring, height 18 mm       | 0.008 |
| 05.110-B | Stop ring, height 12 mm       | 0.007 |
| 05.110-S | Spring for broach             | 0.002 |
| 05.118   | Broach with spring            | 0.015 |
| 05.119   | Broach with groove and spring | 0.015 |
| 05.119-A | Simple broach                 | 0.013 |




| MSA       | Tips  | Ø hole           | Kg    |
|-----------|-------|------------------|-------|
| 05.110-03 | Steel |                  | 0.002 |
| 05.110-04 | Steel |                  | 0.002 |
| 05.110-09 | Steel |                  | 0.002 |
| 05.110-05 | Steel |                  | 0.002 |
| 05.110-08 | Steel |                  | 0.002 |
| 05.110-07 | Steel |                  | 0.002 |
| 05.110-06 | Steel |                  | 0.002 |
| 05.110-01 | Steel | 7.50 mm (length) | 0.004 |
| 05.110-02 | Steel | Flat             | 0.002 |

Spare stainless steel stakes for presses MSA05.050, MSA05.109, MSA05.110, MSA05.111 and MSA05.112.  
Other diameters available upon request.



| MSA       | Tips | Ø hole           | Kg    |
|-----------|------|------------------|-------|
| 05.114-03 |      |                  | 0.002 |
| 05.114-14 |      |                  | 0.002 |
| 05.114-15 |      |                  | 0.002 |
| 05.114-16 |      |                  | 0.002 |
| 05.114-17 |      |                  | 0.002 |
| 05.114-18 |      |                  | 0.002 |
| 05.114-04 |      |                  | 0.002 |
| 05.114-19 |      |                  | 0.002 |
| 05.114-09 |      |                  | 0.002 |
| 05.114-20 |      |                  | 0.002 |
| 05.114-21 |      |                  | 0.002 |
| 05.114-05 |      |                  | 0.002 |
| 05.114-08 |      |                  | 0.002 |
| 05.114-22 |      |                  | 0.002 |
| 05.114-23 |      |                  | 0.002 |
| 05.114-07 |      |                  | 0.002 |
| 05.114-24 |      |                  | 0.002 |
| 05.114-25 |      |                  | 0.002 |
| 05.114-06 |      |                  | 0.002 |
| 05.114-01 |      | 7.50 mm (length) | 0.004 |
| 05.114-02 |      | Flat             | 0.002 |

Spare stakes with PEEK tip for presses MSA05.050, MSA05.114, MSA05.115, MSA05.116 and MSA05.117.  
Other diameters available upon request.



| MSA       | Tips | Ø hole           | Kg    |
|-----------|------|------------------|-------|
| 05.111-03 |      |                  | 0.002 |
| 05.111-12 |      |                  | 0.002 |
| 05.111-04 |      |                  | 0.002 |
| 05.111-09 |      |                  | 0.002 |
| 05.111-11 |      |                  | 0.002 |
| 05.111-05 |      |                  | 0.002 |
| 05.111-08 |      |                  | 0.002 |
| 05.111-10 |      |                  | 0.002 |
| 05.111-07 |      |                  | 0.002 |
| 05.111-06 |      |                  | 0.002 |
| 05.111-13 |      |                  | 0.002 |
| 05.111-01 |      | 7.50 mm (length) | 0.004 |
| 05.111-02 |      | Flat             | 0.002 |

Spare stakes with Delrin® tip for presses MSA05.050, MSA05.109, MSA05.110, MSA05.111 and MSA05.112.  
Other diameters available upon request.

High precision hands fitting press equipped with 2 adjustable and interchangeable broaches, ideal for production series. Suitable for movement holder MSA09.010-xx (see chapter 09).



| MSA    | Use                       | Kg    |
|--------|---------------------------|-------|
| 05.100 | For hour and minute hands | 0.780 |

High precision hands fitting press with 2 adjustable and interchangeable broaches.  
Base Ø 31 mm.  
*See also movement holders MSA 09.010-xx (chapter 09).*

Spare parts :

| MSA      | Item                                                               | Kg    |
|----------|--------------------------------------------------------------------|-------|
| 05.101-A | Adjustable broach with white head for minute hands, Ø hole 1.00 mm | 0.019 |
| 05.101-B | Adjustable broach with black head for hour hands, Ø hole 1.20 mm   | 0.019 |



| MSA    | Use                       | Kg    |
|--------|---------------------------|-------|
| 05.101 | For hour and minute hands | 1.260 |

High precision hands fitting press with 2 adjustable and interchangeable broaches. Revolving head to avoid broach changing.  
Base Ø 31 mm.  
*See also movement holders MSA 09.010-xx (chapter 09).*

Spare parts :

| MSA      | Item                                                               | Kg    |
|----------|--------------------------------------------------------------------|-------|
| 05.101-A | Adjustable broach with white head for minute hands, Ø hole 1.00 mm | 0.019 |
| 05.101-B | Adjustable broach with black head for hour hands, Ø hole 1.20 mm   | 0.019 |


Accessories for presses MSA05.100 and MSA05.101.



| MSA      | Kg    |
|----------|-------|
| 05.101-C | 0.019 |

Simple broach with red head for second hands, flat not pierced.

Hands removing press, without contact with the dial.

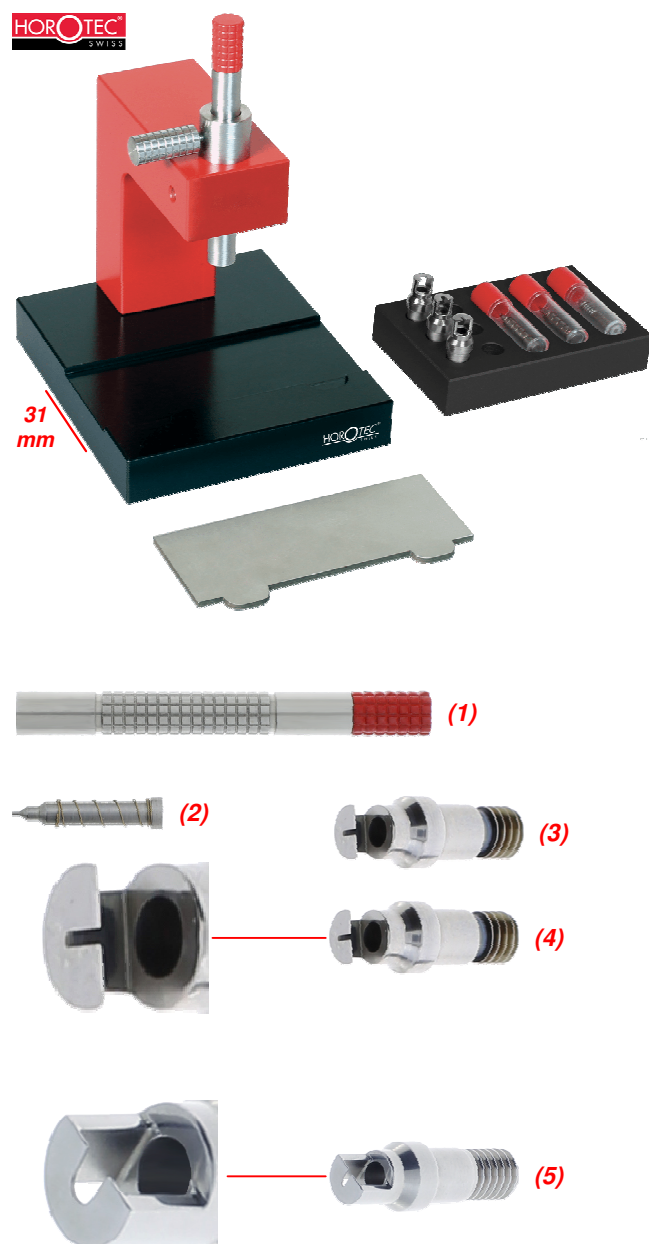

| MSA    | Size            | Kg    |
|--------|-----------------|-------|
| 05.129 | 80 x 80 x 85 mm | 0.700 |

Hands removing press, without contact with the dial.  
This press allows removing safely the hands fitted on dial, guaranteeing their extraction without damaging the dial.

Contents :

- 1 press MSA05.129-01
- 1 hand tool MSA05.128-02
- 1 base MSA05.129-02 for extractors and pins
- 1 removable plate
- 3 extractors MSA05.129-060, MSA05.129-150 and MSA05.129-250
- 3 pins MSA05.128-015, MSA05.128-060 and MSA05.128-100.

Spare parts :

| MSA        | Item                               | Kg    |
|------------|------------------------------------|-------|
| 05.129-01  | Press only                         | 0.660 |
| 05.129-02  | Base only                          | 0.090 |
| 05.128-02  | (1) Hand tool                      | 0.020 |
| 05.128-015 | Pin with spring Ø 0.15 mm          | 0.002 |
| 05.128-060 | (2) Pin with spring Ø 0.60 mm      | 0.002 |
| 05.128-100 | Pin with spring Ø 1.00 mm          | 0.002 |
| 05.129-060 | (3) Hands extractor, notch 0.60 mm | 0.003 |
| 05.129-150 | Hands extractor, notch 1.50 mm     | 0.003 |
| 05.129-250 | Hands extractor, notch 2.50 mm     | 0.003 |

Optional extractors :

| MSA         | Item                                       | Kg    |
|-------------|--------------------------------------------|-------|
| 05.129-060C | (4) Counter hands extractor, notch 0.60 mm | 0.003 |
| 05.129-200  | Hands extractor, notch 2.00 mm             | 0.003 |


Optional extractors with columns :

| MSA      | Item                                             | Kg    |
|----------|--------------------------------------------------|-------|
| 05.128-B | Hands extractor with columns, 0.60 x 3.80 mm     | 0.003 |
| 05.128-C | Hands extractor with columns, 1.45 x 3.80 mm     | 0.003 |
| 05.128-D | (5) Hands extractor with columns, 2.10 x 4.70 mm | 0.003 |

Other sizes of extractors upon request.



## Hands removing press with fine adjustment, without contact with the dial.

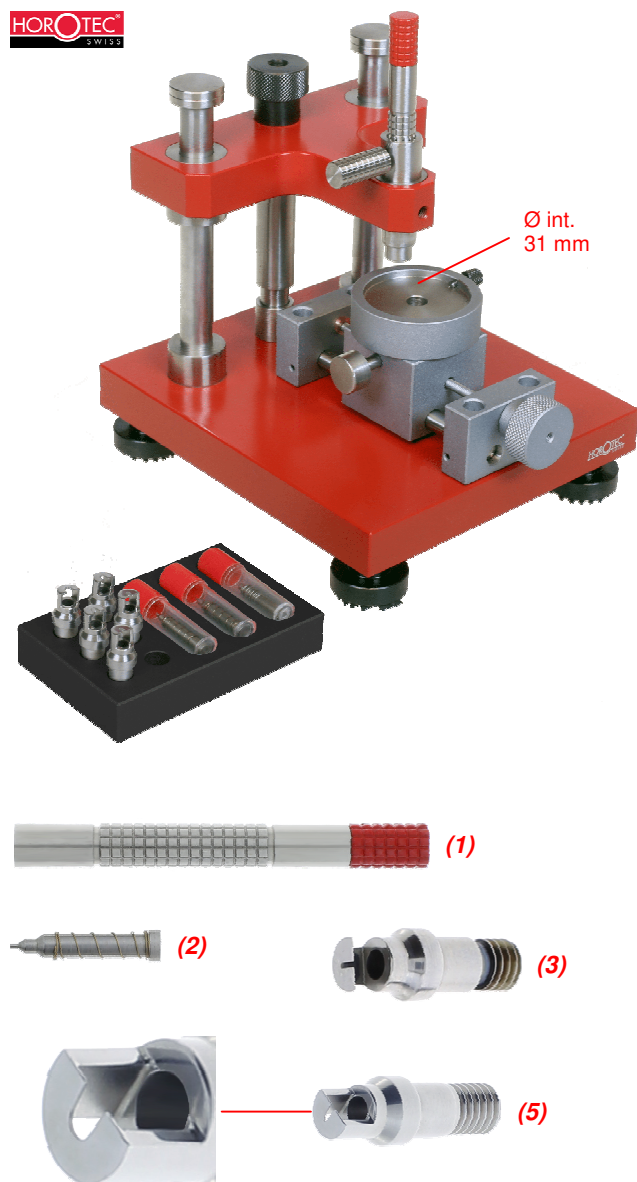

| MSA    | Size               | Kg    |
|--------|--------------------|-------|
| 05.131 | 110 x 125 x 125 mm | 1.875 |

Hands removing press with fine adjustment, without contact with the dial.

This press allows removing safely the hands fitted on dial, guaranteeing their extraction without damaging the dial.

### Contents :

- 1 press MSA05.131-P
- 1 hand tool MSA05.128-02
- 1 base MSA05.129-02 for extractors and pins
- 5 extractors MSA05.129-060, MSA05.129-060C, MSA05.129-150, MSA05.129-200 and MSA05.129-250
- 3 pins MSA05.128-015, MSA05.128-060 and MSA05.128-100.


### Spare parts :

| MSA         | Item                                   | Kg    |
|-------------|----------------------------------------|-------|
| 05.131-P    | Press only                             | 1.720 |
| 05.129-02   | Base only                              | 0.090 |
| 05.128-02   | (1) Hand tool                          | 0.020 |
| 05.128-015  | Pin with spring Ø 0.15 mm              | 0.002 |
| 05.128-060  | (2) Pin with spring Ø 0.60 mm          | 0.002 |
| 05.128-100  | Pin with spring Ø 1.00 mm              | 0.002 |
| 05.129-060  | (3) Hands extractor, notch 0.60 mm     | 0.003 |
| 05.129-060C | Counter hands extractor, notch 0.60 mm | 0.003 |
| 05.129-150  | Hands extractor, notch 1.50 mm         | 0.003 |
| 05.129-200  | Hands extractor, notch 2.00 mm         | 0.003 |
| 05.129-250  | Hands extractor, notch 2.50 mm         | 0.003 |

### Optional extractors with columns :

| MSA      | Item                                             | Kg    |
|----------|--------------------------------------------------|-------|
| 05.128-B | Hands extractor with columns, 0.60 x 3.80 mm     | 0.003 |
| 05.128-C | Hands extractor with columns, 1.45 x 3.80 mm     | 0.003 |
| 05.128-D | (5) Hands extractor with columns, 2.10 x 4.70 mm | 0.003 |

Other sizes of extractors upon request.

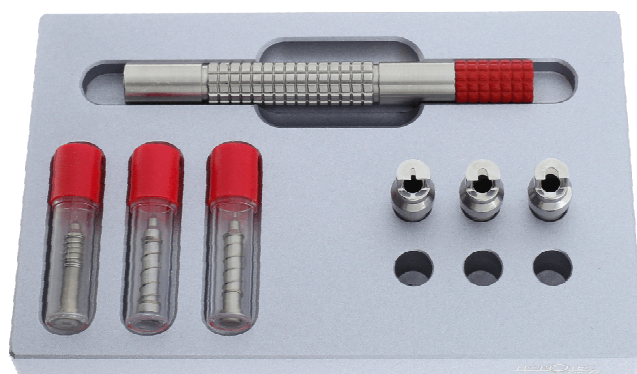

| MSA    | Size             | Kg    |
|--------|------------------|-------|
| 05.128 | 109 x 69 x 15 mm | 0.400 |

Hands removing tool, without contact with the dial.

#### Contents :

- 1 hand tool MSA05.128-02
- 1 base MSA05.128-01 for extractors and pins
- 3 extractors MSA05.129-060, MSA05.129-150 and MSA05.129-250
- 3 pins MSA05.128-015, MSA05.128-060 and MSA05.128-100.

#### Spare parts :

| MSA        | Item                               | Kg    |
|------------|------------------------------------|-------|
| 05.128-01  | Base only                          | 0.225 |
| 05.128-02  | (1) Hand tool                      | 0.020 |
| 05.128-015 | Pin with spring Ø 0.15 mm          | 0.002 |
| 05.128-060 | (2) Pin with spring Ø 0.60 mm      | 0.002 |
| 05.128-100 | Pin with spring Ø 1.00 mm          | 0.002 |
| 05.129-060 | (3) Hands extractor, notch 0.60 mm | 0.003 |
| 05.129-150 | Hands extractor, notch 1.50 mm     | 0.003 |
| 05.129-250 | Hands extractor, notch 2.50 mm     | 0.003 |

#### Optional extractors :

| MSA         | Item                                       | Kg    |
|-------------|--------------------------------------------|-------|
| 05.129-060C | (4) Counter hands extractor, notch 0.60 mm | 0.003 |
| 05.129-200  | Hands extractor, notch 2.00 mm             | 0.003 |

#### Optional extractors with columns :

| MSA      | Item                                             | Kg    |
|----------|--------------------------------------------------|-------|
| 05.128-B | Hands extractor with columns, 0.60 x 3.80 mm     | 0.003 |
| 05.128-C | Hands extractor with columns, 1.45 x 3.80 mm     | 0.003 |
| 05.128-D | (5) Hands extractor with columns, 2.10 x 4.70 mm | 0.003 |

Other sizes of extractors upon request.


## HANDS REMOVING TOOLS



**PAIR**

| MSA           | Tips width | Length | Kg    |
|---------------|------------|--------|-------|
| <b>05.009</b> | 2.50 mm    | 105 mm | 0.020 |


Pair of hand levers with varnished aluminium handles, for sweep second hands and small counter hands of chronometers.  
*Delivered with 2 dial protectors MSA70.004.*

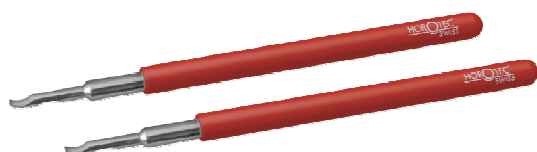

**PAIR**

| MSA           | Tips width | Length | Kg    |
|---------------|------------|--------|-------|
| <b>05.007</b> | 2.50 mm    | 105 mm | 0.022 |

Pair of hand levers with varnished aluminium handles, for wrist watches.  
*Delivered with 2 dial protectors MSA70.004.*

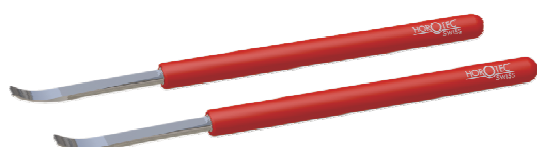

**PAIR**

| MSA           | Tips width | Length | Kg    |
|---------------|------------|--------|-------|
| <b>05.013</b> | 3 mm       | 115 mm | 0.015 |


Pair of hand levers with varnished aluminium handles and polished work surface.  
*Delivered with 2 dial protectors MSA70.004.*



**PAIR**

| MSA           | Tips width | Length | Kg    |
|---------------|------------|--------|-------|
| <b>05.008</b> | 4 mm       | 105 mm | 0.042 |

Pair of hand levers with varnished aluminium handles, for pocket watches.  
*Delivered with 2 dial protectors MSA70.004.*

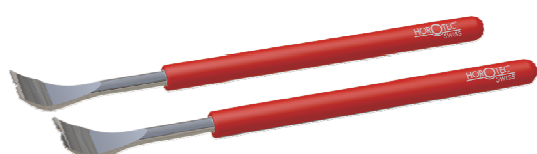

**PAIR**

| MSA           | Tips width | Length | Kg    |
|---------------|------------|--------|-------|
| <b>05.014</b> | 10 mm      | 115 mm | 0.020 |


Pair of hand levers with varnished aluminium handles and polished work surface, for alarm and wall clocks.  
*Delivered with 2 dial protectors MSA70.004.*



PAIR

| MSA    | Tips width | Length | Kg    |
|--------|------------|--------|-------|
| 05.107 | 2.50 mm    | 105 mm | 0.020 |

Pair of hand levers with anodised grey aluminium knurled handles.  
Delivered with 2 dial protectors MSA70.004 in 1 plastic pouch.

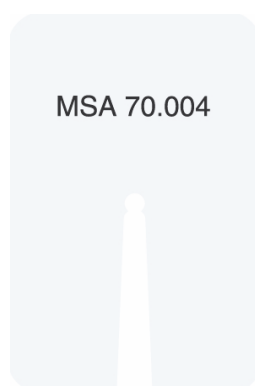

MSA 70.004


| MSA    | Kg    |
|--------|-------|
| 70.004 | 0.001 |

Plastic dial protector to be used during hands extraction.  
Avoids scratching the dial with the hand levers illustrated above.



| ZBG     | Length | Kg    |
|---------|--------|-------|
| 30636-1 | 98 mm  | 0.020 |

PRESTO hands remover for wrist watches, equipped with buffer to avoid damaging the dial.



| MSA    | Kg    |
|--------|-------|
| 05.001 | 0.029 |

Hands holder for broaching holes, equipped with a knurled handle and 10 holes. Perfect for holding onto hands or other small parts.  
Holes diameters : 3.10, 2.70, 2.50, 2.20, 2.00, 1.50, 1.20, 0.85, 0.70 and 0.55 mm.

NOTES

Notes section with horizontal lines for writing.