




xtratech

startech

solartech

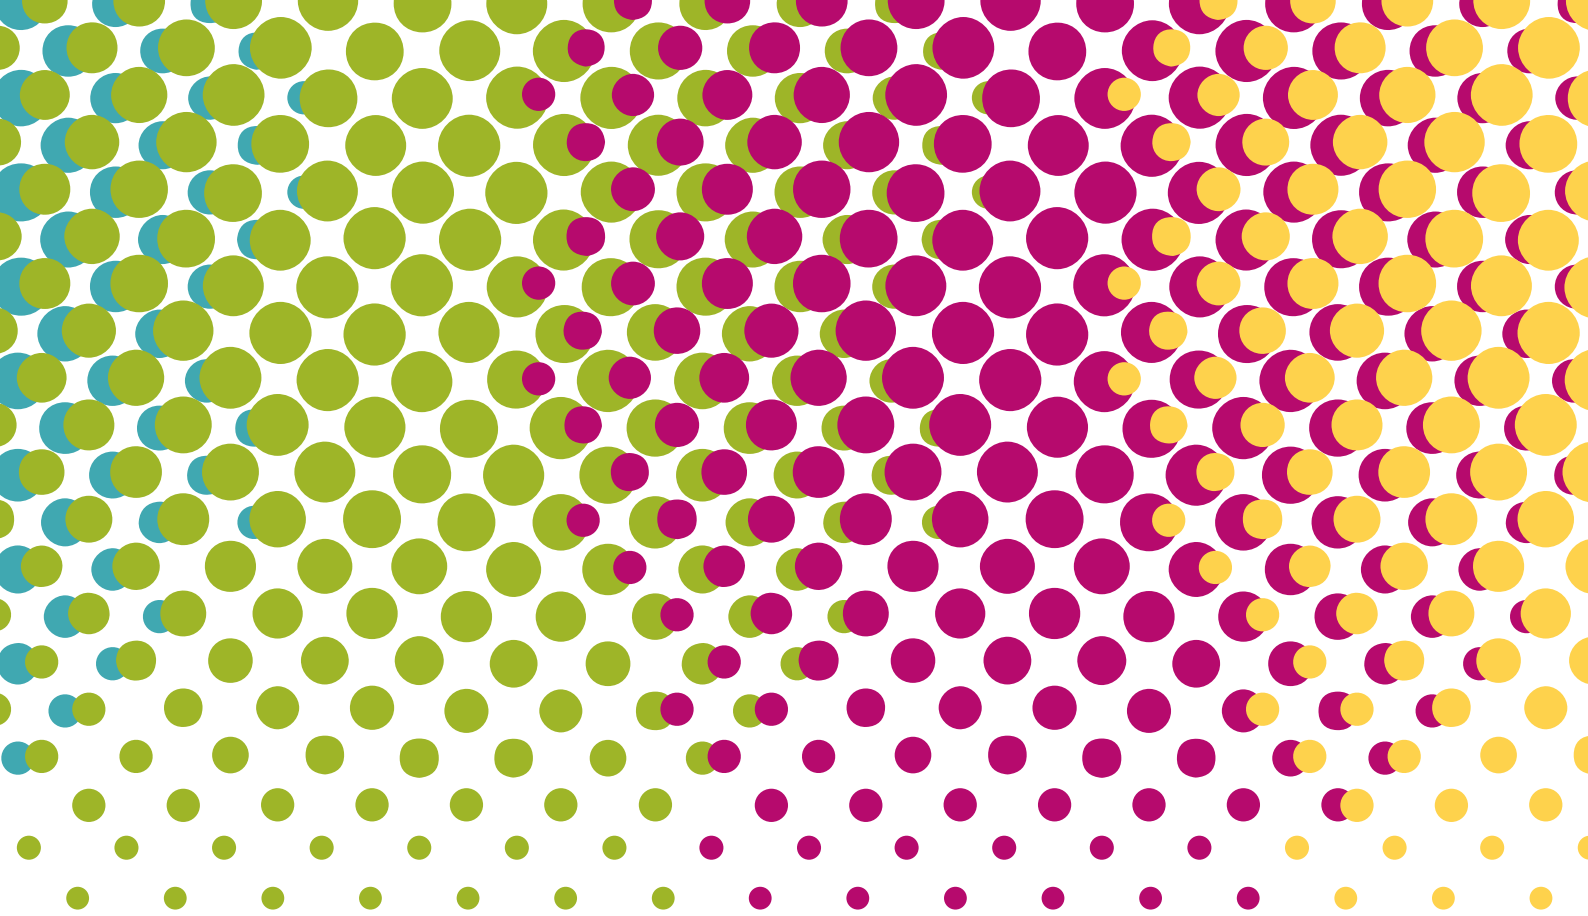

RONDA

Quartz Movements
2025/26

Classic Functions

RONDA slimtech

Series 1000

If designing exclusive styles or jewelry watches, our mini and extra-thin movements will certainly be the stars of your show.

RONDA normtech

Series 700 & 6000.D

The Normtech line is your first choice for high-quality watches with modern, minimalist designs in many sizes.

RONDA powertech

Series 500 & 762E, 763E

Are you planning a fashion collection? Find the matching timepieces in the robust and affordable Powertech line.



$4\frac{1}{4}'' - 10.00\text{ mm}$



Cal. 1042 • 2.90 mm
2 Hands
Mini Movement

$3\frac{3}{4} \times 6''$
 $9.00 \times 13.50\text{ mm}$



Cal. 1032 • 1.95 mm
2 Hands
Mini Movement

$6\frac{3}{4} \times 8''$
 $15.30 \times 17.80\text{ mm}$



Cal. 1062 • 1.90 mm
2 Hands



Cal. 1063 • 1.90 mm
3 Hands




Cal. 1064 • 1.90 mm
2 Hands
Small Second at 4.80 mm



Cal. 1069 • 2.30 mm
2 Hands
Small Second at 6.30 mm


10 ½''' – 23.30 mm



Cal. 1002 • 1.90 mm
2 Hands




Cal. 1005 • 1.90 mm
3 Hands
Date



Cal. 1003 • 1.90 mm
3 Hands



Cal. 1006 • 1.90 mm
2 Hands
Date



Cal. 1004 • 1.90 mm
2 Hands
Small Second at 6.00 mm



Cal. 1009 • 1.90 mm
2 Hands, Date
Small Second at 6.00 mm

11 ½''' – 25.60 mm



Cal. 1012 • 1.90 mm
2 Hands




Cal. 1015 • 1.90 mm
3 Hands
Date



Cal. 1013 • 1.90 mm
3 Hands



Cal. 1016 • 1.90 mm
2 Hands
Date




Cal. 1014 • 1.90 mm
2 Hands
Small Second at 6.00 mm



Cal. 1019 • 1.90 mm
2 Hands, Date
Small Second at 6.00 mm


Series 700 & 6000.D

$5\frac{1}{2} \times 6\frac{3}{4}$ '''
13.00 × 15.15 mm



Cal. 751 • 2.50 mm
2 Hands

$6\frac{3}{4} \times 8$ '''
15.30 × 17.80 mm




Cal. 762 • 2.50 mm
2 Hands


$7\frac{3}{4}$ ''' – 17.20 mm



Cal. 772 • 2.50 mm
2 Hands



Cal. 753 • 2.50 mm
3 Hands



Cal. 763 • 2.50 mm
3 Hands



Cal. 773 • 2.50 mm
3 Hands




Cal. 756 • 3.10 mm
2 Hands
Electronic Time Setting



Cal. 774 • 2.50 mm
2 Hands
Date



Cal. 775 • 2.50 mm
3 Hands
Date

$8 \frac{3}{4}'' - 19.40 \text{ mm}$
 $10 \frac{1}{2}'' - 23.30 \text{ mm}$
 $11 \frac{1}{2}'' - 25.60 \text{ mm}$


Cal. 782 • 2.50 mm
2 Hands



Cal. 702 • 2.50 mm
2 Hands



Cal. 712 • 2.50 mm
2 Hands



Cal. 715 Li • 4.60 mm
3 Hands, Date
Lithium Battery



Cal. 783 • 2.50 mm
3 Hands



Cal. 703 • 2.50 mm
3 Hands



Cal. 713 • 2.50 mm
3 Hands



Cal. 6003.D • 2.50 mm
3 Hands
Date



Cal. 784 • 2.50 mm
2 Hands
Date



Cal. 704 • 2.50 mm
2 Hands
Date




Cal. 714 • 2.50 mm
2 Hands
Date



Cal. 6004.D • 2.50 mm
2 Hands, Date
Small Second at 6.00 mm



Cal. 785 • 2.50 mm
3 Hands
Date




Cal. 705 • 2.50 mm
3 Hands
Date



Cal. 715 • 2.50 mm
3 Hands
Date

Series 500 & 762E, 763E

$6\frac{3}{4} \times 8'''$
 $15.30 \times 17.80 \text{ mm}$




Cal. 762E • 2.50 mm
2 Hands

$8\frac{3}{4}''' - 19.40 \text{ mm}$



Cal. 582 • 3.00 mm
2 Hands



Cal. 763E • 2.50 mm
3 Hands



Cal. 583 • 3.00 mm
3 Hands



Cal. 585 • 3.00 mm
3 Hands, Date

10 ½''' – 23.30 mm




Cal. 502 • 3.00 mm
2 Hands



Cal. 505 • 3.00 mm
3 Hands, Date
Cal. 505 **S** fix motor pulse



Cal. 512 • 3.00 mm
2 Hands



Cal. 515 • 3.00 mm
3 Hands, Date
Cal. 515 **S** fix motor pulse



Cal. 503 • 3.00 mm
3 Hands
Cal. 503 **S** fix motor pulse



Cal. 509 • 3.00 mm
3 Hands
Big Date



Cal. 513 • 3.00 mm
3 Hands
Cal. 513 **S** fix motor pulse



Cal. 519 • 3.00 mm
3 Hands
Big Date

Classic Functions and Chronographs

*Stay in tune with nature by opting for
our exclusive Solartech Swiss Made line.*

Our Solartech movements are known for their accuracy and reliability and do not require frequent battery changes, making them an environmentally friendly option for watch enthusiasts.

RONDA solartech

Series 200


Series 2000

RONDA solartech

The series is powered by a solar cell using solar energy for power supply. Watches designed with a solartech movement can be independently recharged in nature and protect the environment. We recommend watch manufacturers use dials with a minimum light transmission of 25%.

Series 200

11 ½''' – 25.60 mm



Cal. 212 • 2.89 mm
 2 Hands



Cal. 214 • 2.89 mm
 2 Hands
 Date



Cal. 213 • 2.89 mm
 3 Hands



Cal. 215 • 2.89 mm
 3 Hands
 Date

Series 2000

12 ½''' – 28.00 mm



Solar



Cal. 2030.D • 4.40 mm
Chrono, Date
 12 Hours
 30 Minutes
 Small Second



Solar



Cal. 2040.D • 4.40 mm
Chrono, Date
 1/10 Sec. / 10 Hours
 30 Minutes
 Small Second

Chronographs

*Explore the inexhaustible potential
of our Startech chronographs.*

Featuring numerous calendar systems, the range includes movements for men and women, even in XXL size. Opt for the classic 3-6-9 look or choose the sophisticated 6-9-12 design.

RONDA startech

Series 3500

Series 5000

Series Z

Series 8000

RONDA startech

All chronographs feature a center stop second, add and split functions, pushers with a perceptible click, a power-saving mechanism and easy handling. The Big Date movements change directly from 31 to 01.

Series 3500

$10\frac{1}{2} \times 11\frac{1}{2}$ '''
23.90 × 25.60 mm



Cal. 3520.D • 4.90 mm
Chrono, Date
30 Min. / 12 Hours
Small Second



Cal. 3540.D • 4.90 mm
Chrono, Date
30 Minutes
1/10 Sec. / 10 Hours
Small Second

Series 5000

$12\frac{1}{2}$ ''' – 28.00 mm



Cal. 5021.D • 4.40 mm
Chrono, Date
30 Minutes
Small Second



Cal. 5030.D • 4.40 mm
Chrono, Date
12 Hours
30 Minutes
Small Second



Cal. 5040.D • 4.40 mm
Chrono, Date
1/10 Sec. / 10 Hours
30 Minutes
Small Second



Cal. 5040.E • 4.40 mm
Chrono, Day-Date
1/10 Sec. / 10 Hours
30 Minutes
Small Second



Cal. 5130.D • 4.40 mm
Chrono-Alarm, Date
30 Min. / 12 Hours
Small Second



Series 5000

12 ½''' – 28.00 mm



Cal. 5010.B • 4.40 mm
Chrono, Big Date
30 Min. / 12 Hours



Cal. 5050.B • 4.40 mm
Chrono, Big Date
1/10 Second
30 Min. / 12 Hours
Small Second



Cal. 5051.C • 4.40 mm
Chrono, Day, Big Date
same as 5050.C except:
6 h Day and 12 h Big Date




Cal. 5020.B • 4.40 mm
Chrono, Big Date
30 Min. / 12 Hours
Small Second




Cal. 5050.C • 4.40 mm
Chrono, Day, Big Date
1/10 Second
30 Min. / 12 Hours
Small Second



Cal. 5130.B • 4.40 mm
Chrono-Alarm, Big Date
30 Min. / 12 Hours
Small Second



Cal. 5040.B • 4.40 mm
Chrono, Big Date
1/10 Sec. / 10 Hours
30 Minutes
Small Second




Cal. 5040.F • 4.40 mm
Chrono, Day-Date, Month
1/10 Sec. / 10 Hours
30 Minutes
Small Second

Series Z

13 1/4" – 30.00 mm



Cal. Z50 • 4.60 mm
Chrono, Date
 30 Minutes
 Small Second



Cal. Z60 • 4.60 mm
Chrono, Day-Date
 30 Minutes
 Small Second



Cal. Z50 & Z60
Versions with Large Date
 Various colors available
 Calendar positions at 4h-6h-8h-12h

Series 8000

15" – 33.80 mm



Cal. 8040.B • 5.60 mm
Chrono, Big Date
 1/10 Sec. / 10 Hours
 30 Minutes
 Small Second



Cal. 8040.N • 5.60 mm
Chrono, Day Retrograde, Big Date
 1/10 Sec. / 10 Hours
 30 Minutes
 Small Second

Multifunctions

Dive in and be inspired by the amazing design options offered by Xtratech multifunctions.

Choose the perfect movement for your project, depending on your preferred size or specific function.

Ronda xtratech

Series 700 & 6000.B

Series 500

Series 4000

Series X

Series 7000

RONDA xtratech

All multifunctions feature a power-saving mechanism and easy handling. Movements with pushers have a perceptible click. The Big Date movements change directly from 31 to 01.

Series 700 & 6000.B

Multifunctions
RONDA xtratech

17

8 $\frac{3}{4}$ ''' – 19.40 mm



Cal. 788 • 2.98 mm
Moon
Date

10 $\frac{1}{2}$ ''' – 23.30 mm




Cal. 708 • 2.98 mm
Moon
Date

11 $\frac{1}{2}$ ''' – 25.60 mm



Cal. 6003.B • 3.30 mm
Big Date



Cal. 706.1 • 3.00 mm
Day-Date
Moon




Cal. 6004.B • 3.30 mm
Big Date
Small Second at 6.00 mm



Cal. 706.3 • 3.00 mm
Day-Date, Month
Moon



Cal. 6203.B • 3.30 mm
2nd Time Zone
Big Date



Cal. 706.B • 3.70 mm
Day-Date, Week
Moon

Series 500

Series 4000

10 ½''' – 23.30 mm

11 ½''' – 25.60 mm


12 ½''' – 28.00 mm



Cal. 505.24 D • 3.00 mm
24 Hours by disc - GMT
 Date




Cal. 515.24 D • 3.00 mm
24 Hours by disc - GMT
 Date



Cal. 4120.B • 4.40 mm
Alarm, Big Date
 Small Second



Cal. 505.24 H • 3.00 mm
24 Hours by hand - GMT
 Date




Cal. 515.24 H • 3.00 mm
24 Hours by hand - GMT
 Date



Cal. 4310.D • 4.40 mm
Tide, Date
 Small Second



Cal. 507 • 3.00 mm
Day-Date



Cal. 517 • 3.00 mm
Day-Date

Series X

13 1/4''' – 30.00 mm



Cal. X20 • 4.60 mm
Day-Date
Small Second




Cal. X30 • 4.60 mm
24 Hours, Day-Date
Small Second

Series 7000

15''' – 33.80 mm



Cal. 7004.B • 5.60 mm
Big Date
Small Second

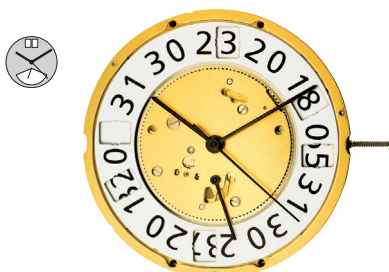

Cal. 7003.L • 5.60 mm
Day Retrograde, Big Date



Cal. 7003.N • 5.60 mm
Day Retrograde, Big Date



Cal. 7004.N • 5.60 mm
Day Retrograde, Big Date
Small Second



Cal. 7004.P • 5.60 mm
Day Retrograde, Big Date
Small Second

Technical Summary

RONDA slimtech

Caliber	Size	Ø Case fitting	Mvt. height	Stem height	Swiss Made	Swiss Parts	Standard Battery	Battery-life (theoretical)	High Battery	Battery-life (theoretical)
1042	4 1/4'''	10.00	2.90	0.55	5/G	5/N	335	36 m	317	63 m
1032	3 3/4 × 6'''	9.00 × 13.50	1.95	0.62	7/G	7/N	317	60 m	379	90 m
1062	6 3/4 × 8'''	15.30 × 17.80	1.90	0.75	4/G	1/N	321	6 y		
1063	6 3/4 × 8'''	15.30 × 17.80	1.90	0.75	5/G EOL	1/N	321	25 m	364	34 m
1064	6 3/4 × 8'''	15.30 × 17.80	1.90	0.75	6/G EOL	2/N	321	25 m	364	34 m
1069	6 3/4 × 8'''	15.30 × 17.80	2.30	1.15	6/G EOL	2/N	321	25 m	364	34 m
1002	10 1/2'''	23.30	1.90	0.75	5/G		341	40 m		
1003	10 1/2'''	23.30	1.90	0.75	8/G EOL		341	25 m	315	40 m
1004	10 1/2'''	23.30	1.90	0.75	10/G EOL		341	25 m	315	40 m
1005	10 1/2'''	23.30	1.90	0.75	8/G EOL		341	25 m	315	40 m
1006	10 1/2'''	23.30	1.90	0.75	8/G		341	25 m	315	40 m
1009	10 1/2'''	23.30	1.90	0.75	10/G EOL		341	25 m	315	40 m
1012	11 1/2'''	25.60	1.90	0.75	5/G		341	40 m		
1013	11 1/2'''	25.60	1.90	0.75	8/G EOL		341	25 m	315	40 m
1014	11 1/2'''	25.60	1.90	0.75	10/G EOL		341	25 m	315	40 m
1015	11 1/2'''	25.60	1.90	0.75	8/G EOL		341	25 m	315	40 m
1016	11 1/2'''	25.60	1.90	0.75	8/G		341	25 m	315	40 m
1019	11 1/2'''	25.60	1.90	0.75	10/G EOL		341	25 m	315	40 m

RONDA normtech

Caliber	Size	Ø Case fitting	Mvt. height	Stem height	Swiss Made	Swiss Parts	Standard Battery	Battery-life (theoretical)	High Battery	Battery-life (theoretical)
751	5 1/2 × 6 3/4'''	13.00 × 15.15	2.50	1.00	4/G	1/N	379	7 y		
753	5 1/2 × 6 3/4'''	13.00 × 15.15	2.50	1.00	5/G EOL	1/N	379	27 m	319	36 m
756	5 1/2 × 6 3/4'''	13.00 × 15.15	3.10		4/G	1/N	379	7 y		
762	6 3/4 × 8'''	15.30 × 17.80	2.50	1.00	4/G		364	10 y		
763	6 3/4 × 8'''	15.30 × 17.80	2.50	1.00	5/G EOL		364	40 m		
772	7 3/4'''	17.20	2.50	1.00	5/G	1/N	364	34 m	377	48 m
773	7 3/4'''	17.20	2.50	1.00	5/G EOL	1/N	364	34 m	377	48 m
774	7 3/4'''	17.20	2.50	1.00	5/G	1/N	364	34 m	377	48 m
775	7 3/4'''	17.20	2.50	1.00	5/G EOL	1/N	364	34 m	377	48 m
782	8 3/4'''	19.40	2.50	1.00	5/G	1/N	362	42 m	397	54 m
783	8 3/4'''	19.40	2.50	1.00	5/G EOL	1/N	362	42 m	397	54 m
784	8 3/4'''	19.40	2.50	1.00	5/G	1/N	362	42 m	397	54 m
785	8 3/4'''	19.40	2.50	1.00	5/G EOL	1/N	362	42 m	397	54 m
702	10 1/2'''	23.30	2.50	1.00	5/G	1/N	371	60 m	395	78 m
703	10 1/2'''	23.30	2.50	1.00	5/G EOL	1/N	371	60 m	395	78 m
704	10 1/2'''	23.30	2.50	1.00	5/G	1/N	371	60 m	395	78 m
705	10 1/2'''	23.30	2.50	1.00	5/G EOL	1/N	371	60 m	395	78 m
712	11 1/2'''	25.60	2.50	1.00	5/G	1/N	371	60 m	395	78 m
713	11 1/2'''	25.60	2.50	1.00	5/G EOL	1/N	371	60 m	395	78 m
714	11 1/2'''	25.60	2.50	1.00	5/G	1/N	371	60 m	395	78 m
715	11 1/2'''	25.60	2.50	1.00	5/G EOL	1/N	371	60 m	395	78 m
715 Li	11 1/2'''	25.60	4.60	1.00	5/G EOL	5/N	CR 2016	> 10 y		
6003.D	11 1/2'''	25.60	2.50	1.00	4/G EOL		373	40 m	371	56 m
6004.D	11 1/2'''	25.60	2.50	1.00	5/G EOL		373	40 m	371	56 m

Caliber	Size	Ø Case fitting	Mvt. height	Stem height	Swiss Made	Swiss Parts	Standard Battery	Battery-life (theoretical)	High Battery	Battery-life (theoretical)
762 E	6 ¾ × 8'''	15.30 × 17.80	2.50	1.00	1/N	1/N	364	10 y		
763 E	6 ¾ × 8'''	15.30 × 17.80	2.50	1.00	1/N	1/N	364	40 m	377	58 m
582	8 ¾'''	19.40	3.00	1.50	1/N	1/N	362	38 m		
583	8 ¾'''	19.40	3.00	1.50	1/N	1/N	362	38 m		
585	8 ¾'''	19.40	3.00	1.50	1/N	1/N	362	38 m		
502	10 ½'''	23.30	3.00	1.50	1/N	1/N	371	45 m	395	60 m
503 *	10 ½'''	23.30	3.00	1.50	1/N	1/N	371	45 m	395	60 m
505 *	10 ½'''	23.30	3.00	1.50	1/N	1/N	371	45 m	395	60 m
509	10 ½'''	23.30	3.00	1.50	1/N	1/N	371	45 m	395	60 m
512	11 ½'''	25.60	3.00	1.50	1/N	1/N	371	45 m	395	60 m
513 *	11 ½'''	25.60	3.00	1.50	1/N	1/N	371	45 m	395	60 m
515 *	11 ½'''	25.60	3.00	1.50	1/N	1/N	371	45 m	395	60 m
519	11 ½'''	25.60	3.00	1.50	1/N	1/N	371	45 m	395	60 m

RONDA startech

Caliber	Size	Ø Case fitting	Mvt. height	Stem height	Swiss Made	Swiss Parts	Battery	Battery-life (theoretical)
3520.D	10 ½ × 11 ½'''	23.90 × 25.60	4.90	1.70	4/G	4/N	384	54 m
3540.D	10 ½ × 11 ½'''	23.90 × 25.60	4.90	1.70	5/G	5/N	384	54 m
5021.D	12 ½'''	28.00	4.40	1.90	10/G	5/N	395	54 m
5030.D	12 ½'''	28.00	4.40	1.90	13/G	6/N	395	54 m
5040.D	12 ½'''	28.00	4.40	1.90	13/G	6/N	395	54 m
5040.E	12 ½'''	28.00	4.40	1.90	13/G		395	54 m
5010.B	12 ½'''	28.00	4.40	1.90	10/G		395	54 m
5020.B	12 ½'''	28.00	4.40	1.90	10/G	5/N	395	54 m
5040.B	12 ½'''	28.00	4.40	1.90	13/G	6/N	395	54 m
5050.B	12 ½'''	28.00	4.40	1.90	13/G	6/N	395	54 m
5050.C	12 ½'''	28.00	4.40	1.90	13/G		395	54 m
5051.C	12 ½'''	28.00	4.40	1.90	13/G		395	54 m
5040.F	12 ½'''	28.00	4.40	1.90	13/G		395	54 m
5130.D	12 ½'''	28.00	4.40	1.90	13/G	6/N	395	48 m
5130.B	12 ½'''	28.00	4.40	1.90	13/G		395	48 m
Z50	13 ¾'''	30.00	4.60	1.75	0/N	0/N	395	50 m
Z60	13 ¾'''	30.00	4.60	1.75	0/N	0/N	395	50 m
8040.B	15'''	33.80	5.60	3.30	13/G		395	48 m
8040.N	15'''	33.80	5.60	3.30	13/G		395	48 m

Technical Summary

RONDA xtratech

Caliber	Size	Ø Case fitting	Mvt. height	Stem height	Swiss Made	Swiss Parts	Standard Battery	Battery-life (theoretical)	High Battery	Battery-life (theoretical)
788	8 ¾'''	19.40	2.98	1.48	5/G EOL	1/N	362	42 m	397	54 m
706.1	10 ½'''	23.30	3.00	1.50	5/G EOL	1/G	371	60 m		
706.3	10 ½'''	23.30	3.00	1.50	5/G EOL	1/G	371	60 m		
706.B	10 ½'''	23.30	3.70	2.20	5/G EOL		371	44 m		
708	10 ½'''	23.30	2.98	1.48	5/G EOL	1/N	371	60 m		
505.24 H	10 ½'''	23.30	3.00	1.50	1/N	1/N	371	45 m	395	60 m
505.24 D	10 ½'''	23.30	3.00	1.50	1/N	1/N	371	45 m	395	60 m
507	10 ½'''	23.30	3.00	1.50	1/N	1/N	371	45 m	395	60 m
515.24 H	11 ½'''	25.60	3.00	1.50	1/N	1/N	371	45 m	395	60 m
515.24 D	11 ½'''	25.60	3.00	1.50	1/N	1/N	371	45 m	395	60 m
517	11 ½'''	25.60	3.00	1.50	1/N	1/N	371	45 m	395	60 m
6003.B	11 ½'''	25.60	3.30	1.80	4/G EOL		373	40 m	371	56 m
6004.B	11 ½'''	25.60	3.30	1.80	5/G EOL		373	40 m	371	56 m
6203.B	11 ½'''	25.60	3.30	1.80	5/G EOL		373	40 m	371	56 m
4120.B	12 ½'''	28.00	4.40	1.90	7/G	3/N	395	50 m		
4310.D	12 ½'''	28.00	4.40	1.90	7/G	4/N	395	60 m		
X20	13 ¾'''	30.00	4.60	1.75	0/N	0/N	395	60 m		
X30	13 ¾'''	30.00	4.60	1.75	0/N	0/N	395	60 m		
7002.B	15'''	33.80	5.60	3.30	5/G		381	52 m		
7003.B	15'''	33.80	5.60	3.30	5/G EOL		381	52 m		
7004.B	15'''	33.80	5.60	3.30	6/G EOL		381	48 m		
7003.L	15'''	33.80	5.60	3.30	5/G EOL		381	52 m		
7003.N	15'''	33.80	5.60	3.30	5/G EOL		381	52 m		
7004.N	15'''	33.80	5.60	3.30	6/G EOL		381	48 m		
7004.P	15'''	33.80	5.60	3.30	6/G EOL		381	48 m		


RONDA solartech

Caliber	Size	Ø Case fitting	Mvt. height	Stem height	Swiss Made	Rechargeable Battery	Battery-running-time **
212	11 ½'''	25.60	2.89	1.42	5/G	MT920	8 m
213	11 ½'''	25.60	2.89	1.42	5/G	MT920	8 m
214	11 ½'''	25.60	2.89	1.42	5/G	MT920	8 m
215	11 ½'''	25.60	2.89	1.42	5/G	MT920	8 m
2030.D	12 ½'''	28.00	4.40	1.90	13/G	MT920	> 5 m
2040.D	12 ½'''	28.00	4.40	1.90	13/G	MT920	> 5 m

* Also available with fix motor pulse (503 **S**, 505 **S**, 513 **S**, 515 **S**)
battery-life 24 months (standard battery).

** The running time refers to a fully charged battery without exposure to light.

4,5,7/.. = Number of jewels
N = Nickel, **G** = Gilt
EOL = End of Life System

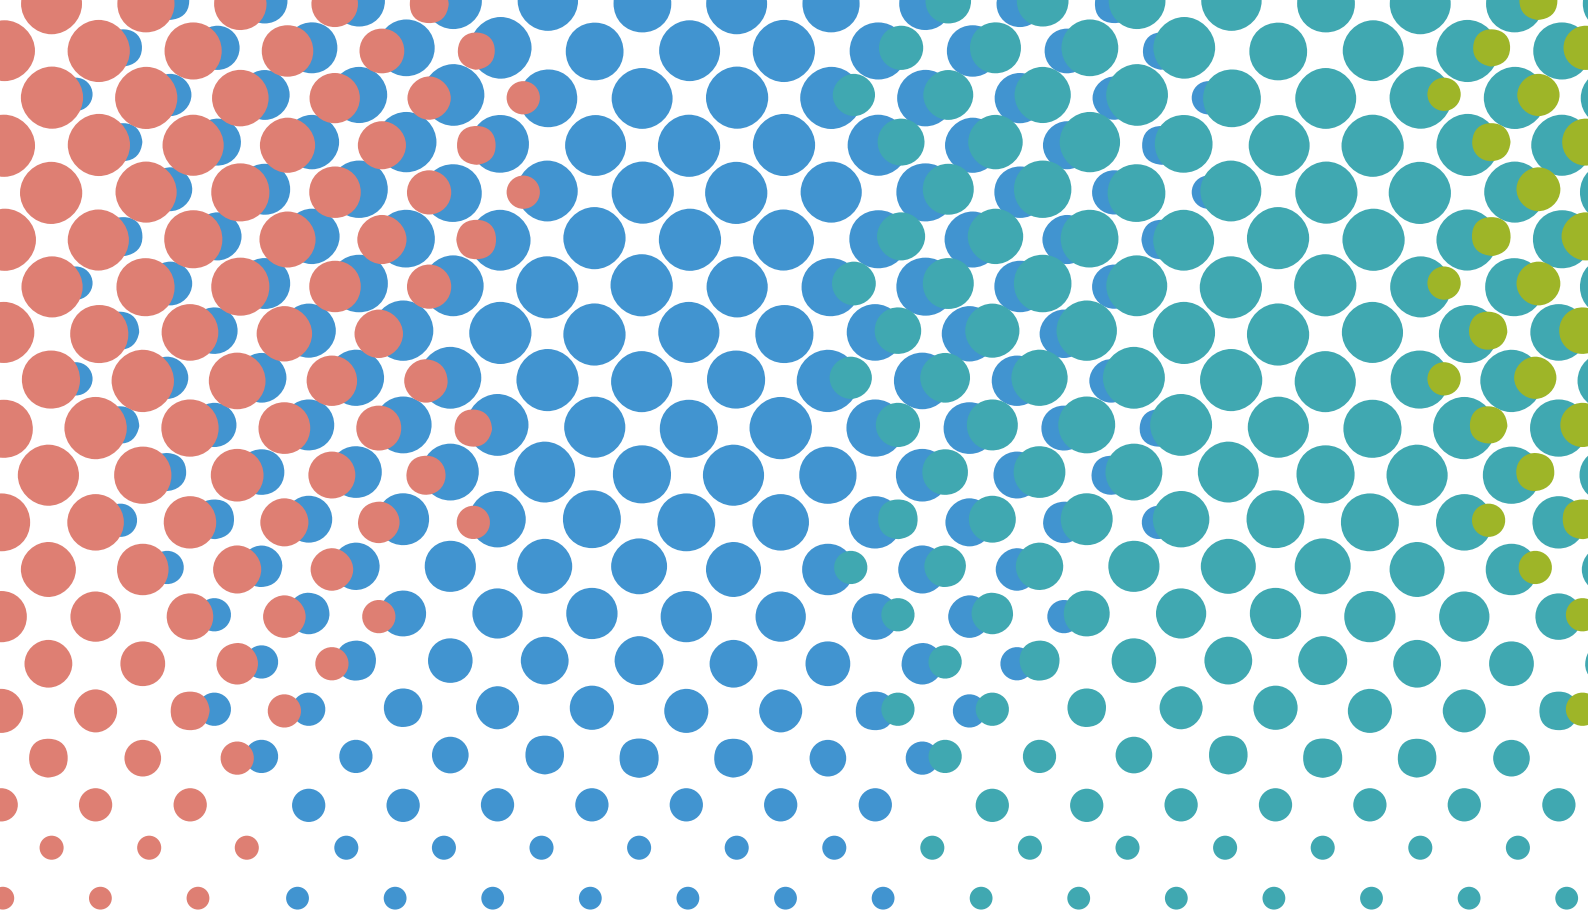

powertech

normtech

slimtech

RONDA AG

Hauptstrasse 10
4415 Lausen
Switzerland
+ 41 61 926 50 00
info@ronda.ch

RONDA Ltd.

Unit 19, 27/F, Tower B
Southmark, 11 Yip Hing Street
Wong Chuk Hang, Aberdeen, Hong Kong
+ 852 2542 0249
info@ronda.com.hk

ronda.ch