

ISAQUARTZ

Cal 608 / 1300




SWISS MADE

ISASWISS CONCEPT

6 3/4 x 8 '''

15.30 x 17.80 mm

H. 3.10

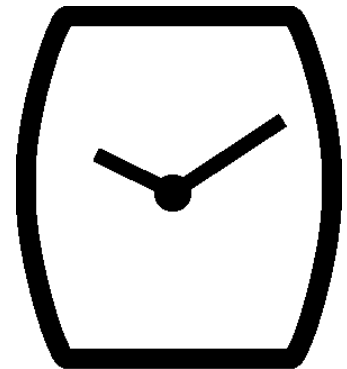

BASIC 2 HANDS

In conformity with RoHS standard

ISASWISS
WATCH MECHANISMS



Caractéristiques:

Mouvement électronique à quartz. Moteur rotatif pas à pas, 1 pas par seconde.
2 Aiguilles
Tige 2 positions.
Dispositif stop mécanique et électrique.

Characteristics:

Electronic quartz movement. Rotating stepping motor, 1 step per second.
2 Hands
Stem 2 positions.
Mechanical and electrical stop device.


Technische Angaben:

Elektronisches Quartz-Uhrwerk Schrittschaltmotor, 1 Schritt pro Sekunde.
2 Zeiger
Stellwelle 2 Positionen.
Möglichkeit mechanisch oder elektrisch zu stoppen.

Critères Criteria Kriterium		Conditions Conditions Bedingungen		Min.	Typ.	Max.	Unités Units Einheit	
Consommation Current consumption Stromaufnahme		U=1.55V T=25°C			0.80		µA	
Marche instantanée Instantaneous rate Momentaner Gang		U=1.55V T=25°C		-0.5 (-15)		+ 0.5 (+15)	s/jour s/day s/Tag (s/mois s/month s/Monat)	
Température de fonctionnement Operating temperature Betriebstemperatur				0		+ 50	°C	
Résistance aux champs magnétiques Resistance to magnetic fields Magnetfeldabschirmung					1500 (18.8)		A/m (Oe)	


Qté Qty Menge	Désignation Designation Bezeichnung		Type Model Typ	Tension Voltage Spannung	Code Code Code	Capacité Capacity Kapazität	Autonomie théorique Theoretical Autonomy Theoretische Gangreserve	
1	Pile Battery Batterie	6.80 x 2.60	SR 626 SW	1.55 V	377	28 mAh	48	mois months Monate

CAGE / FRAME

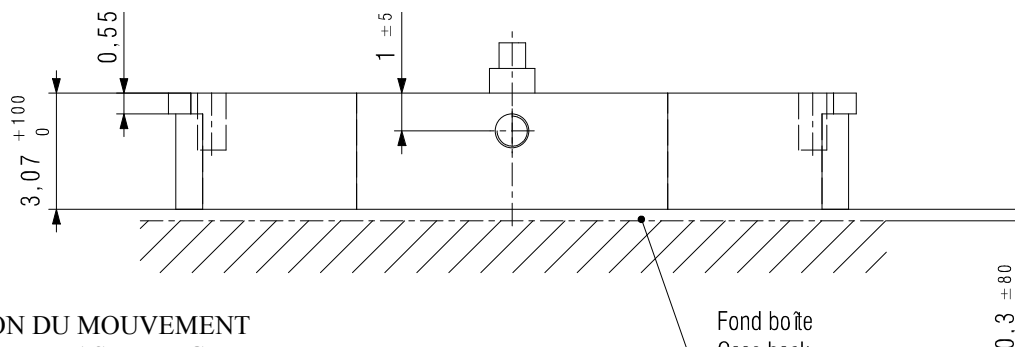

- FIXATION DU MOUVEMENT
MOVEMENT FASTENING
CERCLE D'EMBOITAGE
CASING RING

- AUTRES FIXATIONS POSSIBLES
OTHER POSSIBLE FASTENINGS

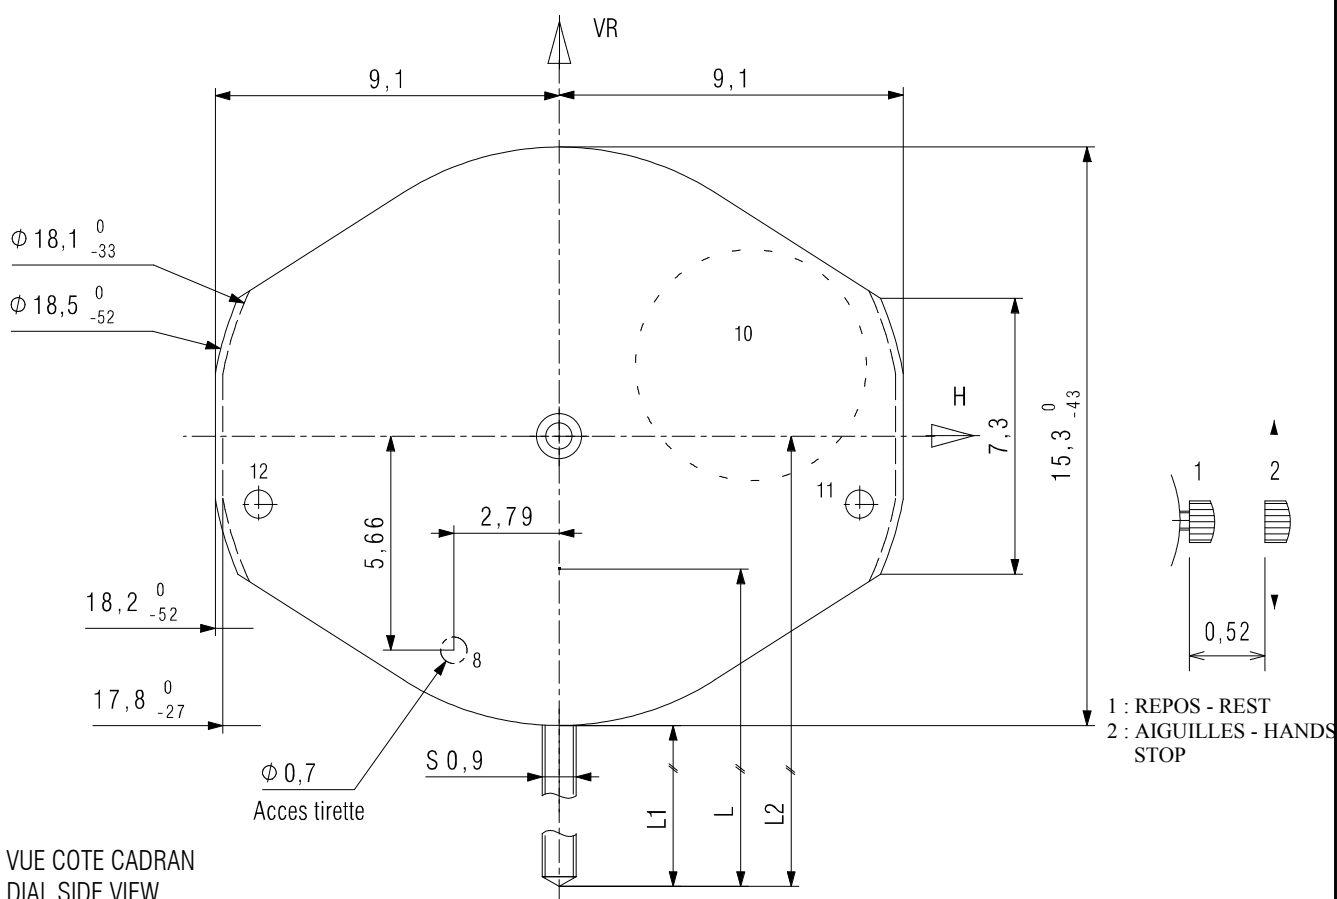

DIMENSIONS IN mm - TOLERANCES IN µm.

Tige en position repos / Stem in rest position	L	L1	L2
Standard / Standard	18.30 +/- 100	13.1	20.75

ISAQUARTZ

608 / 1300



SWISS MADE





ISASWISS CONCEPT

6 3/4 x 8'''

15.30 x 17.80 mm

CADRAN / DIAL

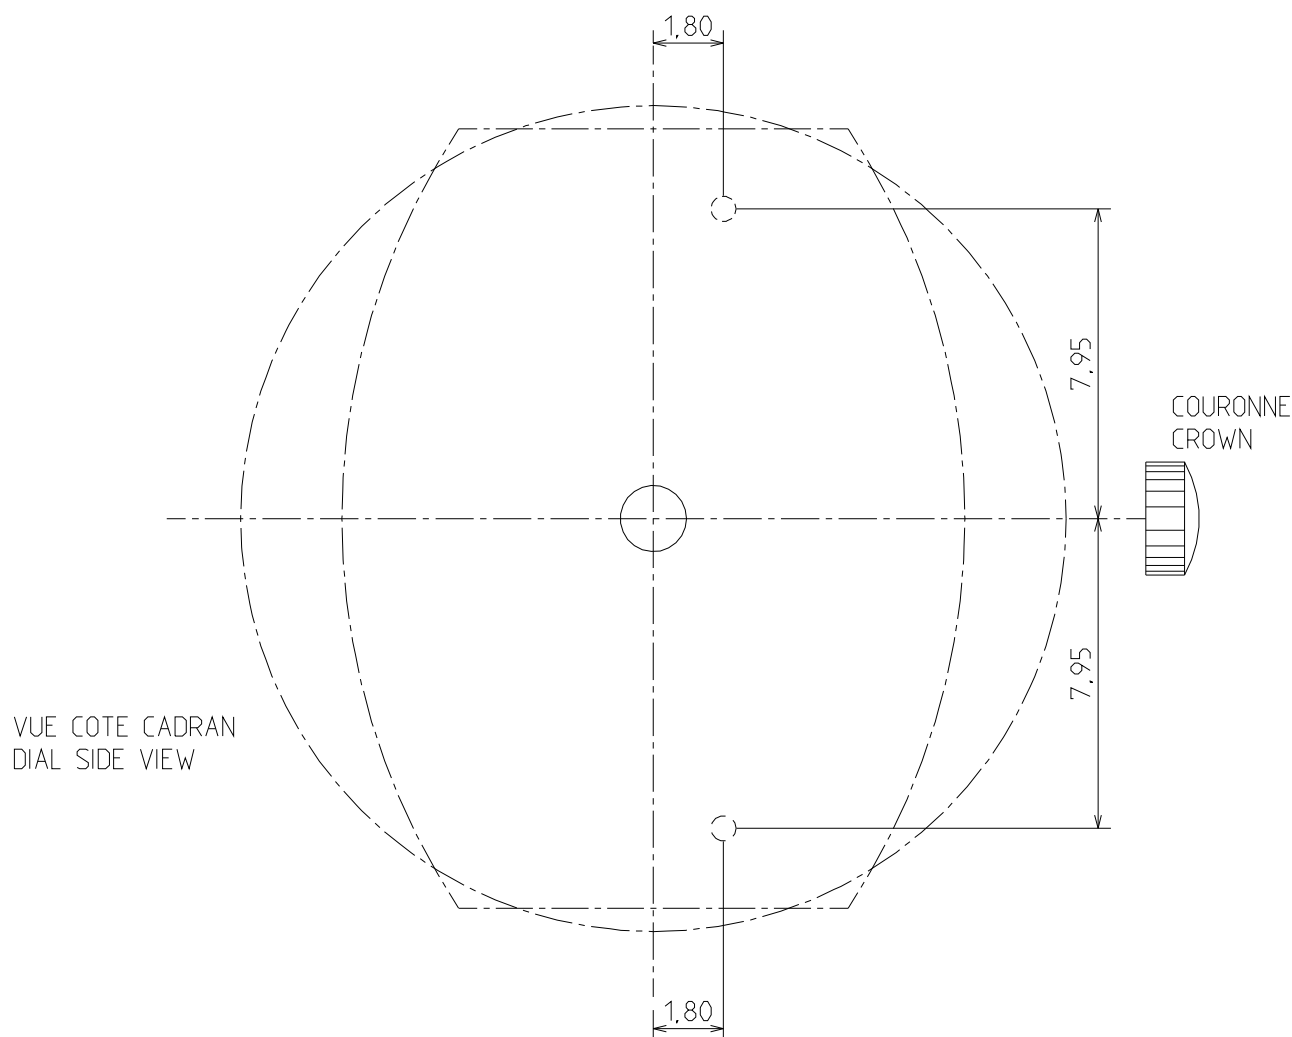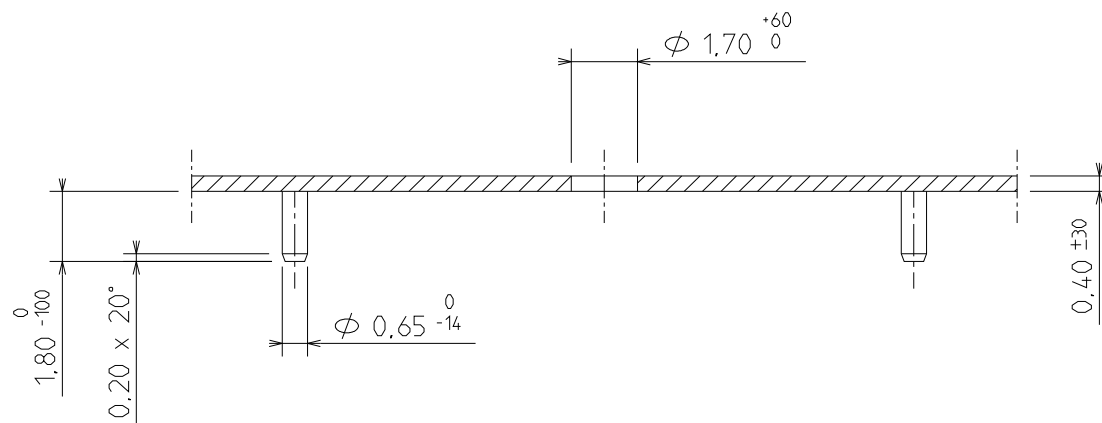

DIMENSIONS IN mm - TOLERANCES IN μm .

In conformity with RoHS standard

Doc. n° 0312214 - C Up date . 08/10/2010 - Page 4

ISASWISS
WATCH MECHANISMS

www.isaswiss.com


ISA SWISS S.A.
Champ-Nauger 2
CH -2416 Les Brenets
Switzerland
Tél +41 (0)32 930 80 85
Fax +41 (0)32 930 80 86

ISA PACIFIC Co. Ltd.
Room 1605, Eastern Center
1065 King's Road, Quarry Bay,
Hong-Kong
Tél +852 21 68 33 88
Fax +852 25 18 30 33



AIGUILLAGE / HAND-FITTING

AUTRES AIGUILLAGES SUR DEMANDE
OTHER HAND-FITTING ON REQUEST

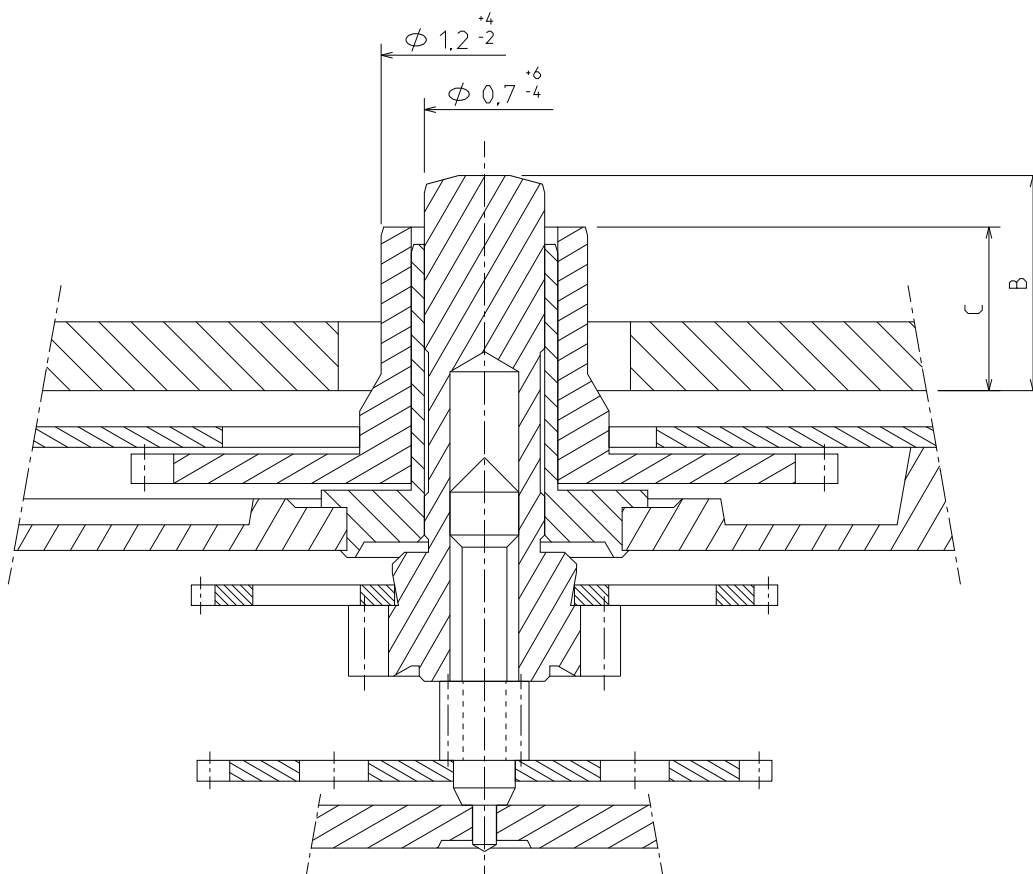

AIGUILLAGE / HAND-FITTING	Dépassement / Height over dial seat		Epaisseur cadran / Dial Thickness
	B	C	
	Chaussée / Cannon pinion	Roue des heures / Hour wheel	
N°2	1.25	0.80	0.40
Hauteur tube / Pipe height	0.25	0.50	-

CHOCS 550 g / 550 g SHOCKS	Masse / Mass	Balourd / Unbalance	Inertie / Inertia	FORCE DE CHASSAGE / PRESS-IN-FORCE
Aiguille des minutes - Minute Hand	≤ 250 mg	≤ 10 µNm	≤ 8 gmm ²	≤ 25 N

DIMENSIONS IN mm. - TOLERANCES IN µm.

In conformity with RoHS standard

Doc. n° 0312214 - C Up date . 08/10/2010 - Page 5