



Cal. 6119C

Characteristics

Casing diameter: 27.00 ϕ mm
 Maximum height: 5.15 mm
 Vibrations per hour: 21,600
 Automatic winding with sweep second
 Calendar (day & date)
 Instant setting device for day & date calendar
 Bilingual change-over system for day of week
 "Diashock" Shock Resistant Device
 "Diafix" Oil Lubrication Device

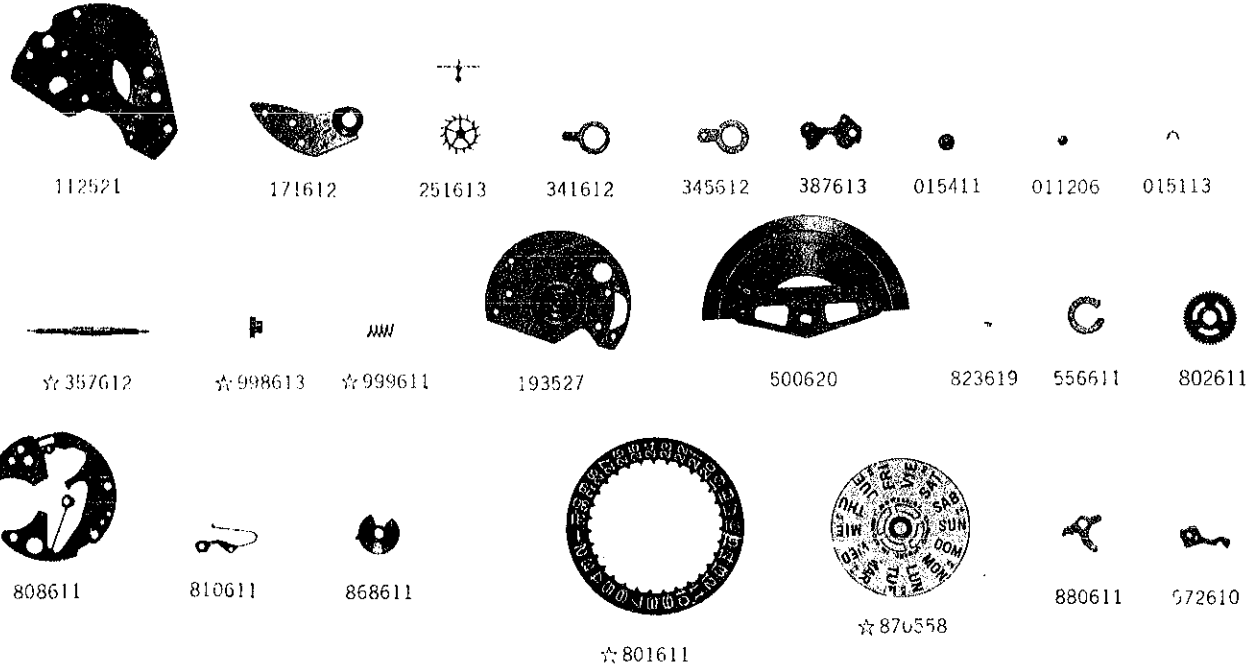

Calibre No. 6119C		Jewels 21j	Style Name	
⇨ Basic Calibre 6106A 25J Catalog No. 61-06-1				
PART NO.	LIST OF MATERIALS	PART NO.	LIST OF MATERIALS	
112521	Barrel & train-wheel bridge	883610	Date corrector spring	
122612	Center wheel bridge	☆884611	Holding ring for dial	
161805	Pallet cock	963610	Snap for day star with dial disk	
171612	Balance cock	972610	Day-date corrector finger	
193527	Framework for automatic device with ball-bearing	022150	Stud screw	
205613	Complete barrel with arbor	022252	Holder screw for transmission wheel & pawl lever	
213612	Barrel arbor	022257	Date corrector spring screw	
224611	Center wheel & pinion with cannon pinion	022269	Minute wheel bridge screw (Cheese-head screw)	
225611	Cannon pinion	022351	Center wheel bridge screw	
231610	Third wheel & pinion	022458	Screw for oscillating weight	
241611	Sweep second wheel & pinion	022467	Ratchet wheel screw	
251613	Escape wheel & pinion	022468	Pallet cock screw	
261611	Minute wheel	022470	Framework screw for automatic device with ball-bearing	
271611	Hour wheel	022471	Click screw	
281611	Setting wheel	022493	Bridge screw	
282611	Clutch wheel	022662	Setting lever spring screw	
285611	Ratchet wheel	022677	Screw for day & date driving wheel	
301611	Jewelled pallet fork & staff	022760	Minute wheel bridge screw (Chamfer-head screw)	
310611	Balance complete with stud	022760	Date dial guard screw	
315611	Balance staff	022761	Dial screw	
331610	Roller with jewel	011145	Upper hole jewel for center wheel	
341612	Regulator	011146	Lower hole jewel for center wheel	
345612	Stud holder	011306	Upper hole jewel for 3rd wheel	
354615	Winding stem	011306	Lower hole jewel for 3rd wheel	
☆ 357612	Click	011306	Upper hole jewel for sweep second wheel	
381611	Setting lever with axle	011503	Upper hole jewel for pallet	
383611	Yoke (Clutch lever)	011503	Lower hole jewel for pallet	
384611	Yoke (Clutch lever)	011147	Upper hole jewel for transmission wheel	
387613	Minute wheel bridge	011147	Lower hole jewel for transmission wheel	
388611	Setting lever spring	023150	Tube for pallet cock screw (Cylinder type)	
☆397610	Lever for unlocking stem	023151	Tube for bridge screw	
401615	Main-spring with slipping attachment	023170	Tube for pallet cock screw (Recessed type)	
☆ 998613	Indicator wheel	023171	Tube for framework screw of automatic device	
☆ 999611	Indicator wheel spring	023417	Date corrector pin	
014363	Diashock upper frame			
014364	Diashock lower frame			
014365	Diashock hole jewel with frame			
011210	Diashock cap jewel			
014317	Diashock spring			
015411	Diafix upper hole jewel with frame for escape wheel			
015411	Diafix lower hole jewel with frame for escape wheel			
011206	Diafix cap jewel			
015113	Diafix spring			
500620	Oscillating weight			
505611	Transmission wheel			
823619	Eccentric post			
831611	Pawl lever with jewel			
839610	Holder for transmission wheel & pawl lever			
556611	Date finger			
☆ 801611	Date dial			
802611	Date driving wheel			
808611	Date dial guard			
810611	Date jumper			
817610	Intermediate date wheel			
868611	Day finger			
☆ 870558	Day star with dial disk (English ↔ Spanish)			
880611	Date corrector			

☆ ⇨ Please see remarks on the next page.
 As for all other parts not shown here, please refer to the basic calibre
 (Cal. No. 6106A 25J Catalog No. 61-06-1 Green page).

☆ ⇨ Please see remarks on the next page.
 Items in light letters are not shown in photos; those parts are interchangeable with the basic calibre
 (Cal. No. 6106A 25J Catalog No. 61-06-1 Green page).

Calibre No. 6119C	Jewels 21j	Style Name
↔ Basic Calibre 6106A 25J Catalog No. 61-06-1		

Remarks:

Winding stem (☆ 357612)
Indicator wheel (☆ 998613)
Indicator wheel spring (☆ 999611) } These parts are available only for watches with rotating dial ring.

Lever for unlocking stem

☆ 397610 Used only for the one-piece waterproof case.
If the lever for unlocking stem is required in any other type, specify the dial No. or the case No.

Date dial

☆ 801611 (White figures on black background) Used when the crown is located at 4 o'clock and the date frame at 3 o'clock.
If the date dial is required in any other type, specify ① Cal. No. ② the crown position ③ the date frame position and ④ the dial No.

Day star with dial disk

☆ 870558 (English ↔ Spanish) Used when the crown is located at 4 o'clock and the day frame at 3 o'clock.
When ordering any other type of the day star with dial disks, clearly mention the number printed on the disk. If the number is unknown, specify ① Cal. No. ② the crown position ③ the day frame position ④ the dial No. and ⑤ the national language.

Holding ring for dial—— Measure the total thickness and the outside diameter —————

☆ 884611 1.8mm total thickness and 29.1 ϕ mm outside diameter
If the holding ring for dial is required in any other type, specify ① Cal. No. and ② the dial No.