
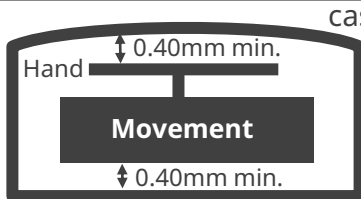
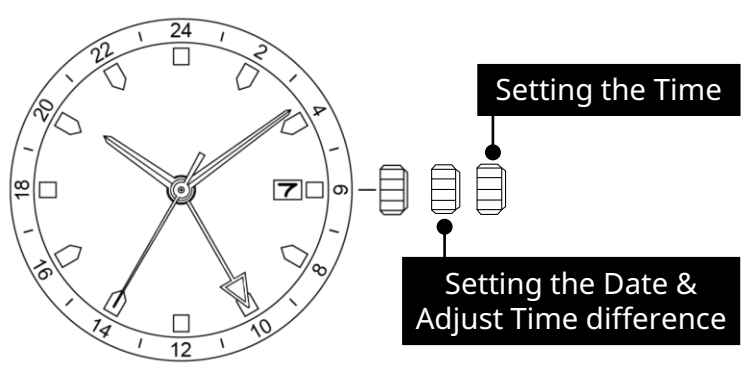


9075

Size <ligne>	11 ½'''
Height <mm>	4.92
Accuracy <per Day>	-10 ~ +30 sec
Posture Difference	(under) 30 sec
Running Time	(more than) 42 hours
Vibration Frequency <per Hour>	(vibration) 28800
Clearance	 <p>case Hand 0.40mm min. Movement 0.40mm min.</p> <p>Clearance changes subject to the glass, case structure, and the length of the hand.</p>
Jewels	24 pcs
Lift Angle	51 degree
Original Package	100 pcs

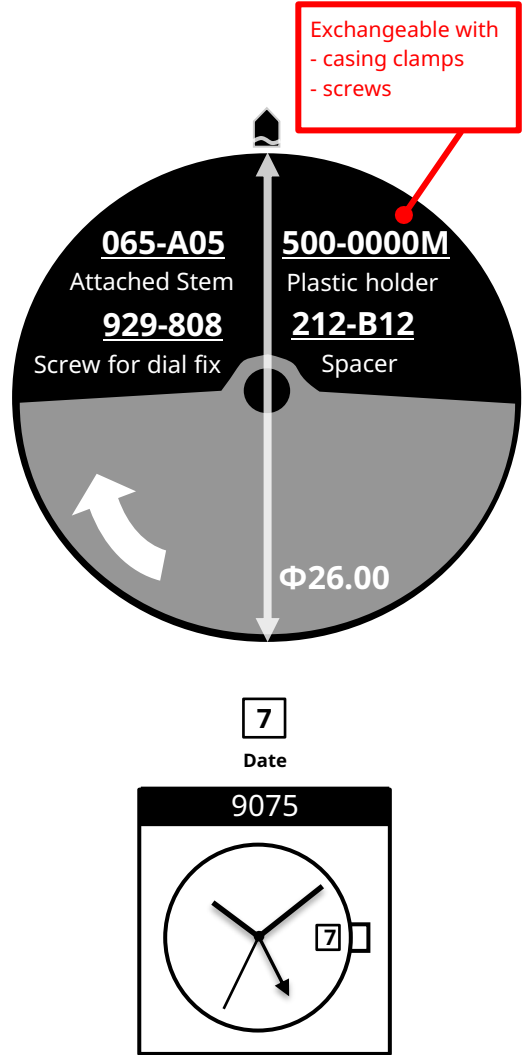

INFORMATION

Time measurement & Winding

Mechanical


Accuracy

Measure within lapse of 10~60 minutes from full winding with ① posture.

Posture difference

Measure accuracy in below ①~④ postures.


- ① Dial side up
- ② 6 o'clock side up
- ③ 9 o'clock side up
- ④ 3 o'clock side up

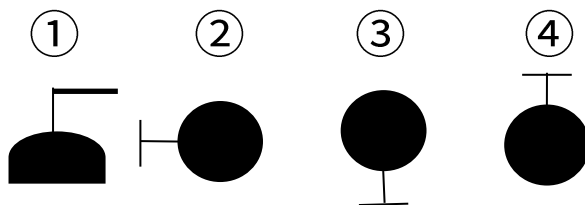


■ To make full-winded

90 / 91	Turn the crown 40 times
82 / 8N	Turn the crown 40 times
6T	Turn the crown 20 times


■ Winding direction

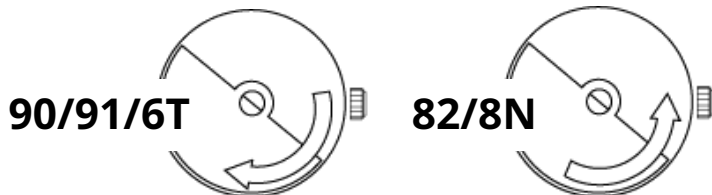

Assembly - Disassembly chart for Cal. 9075

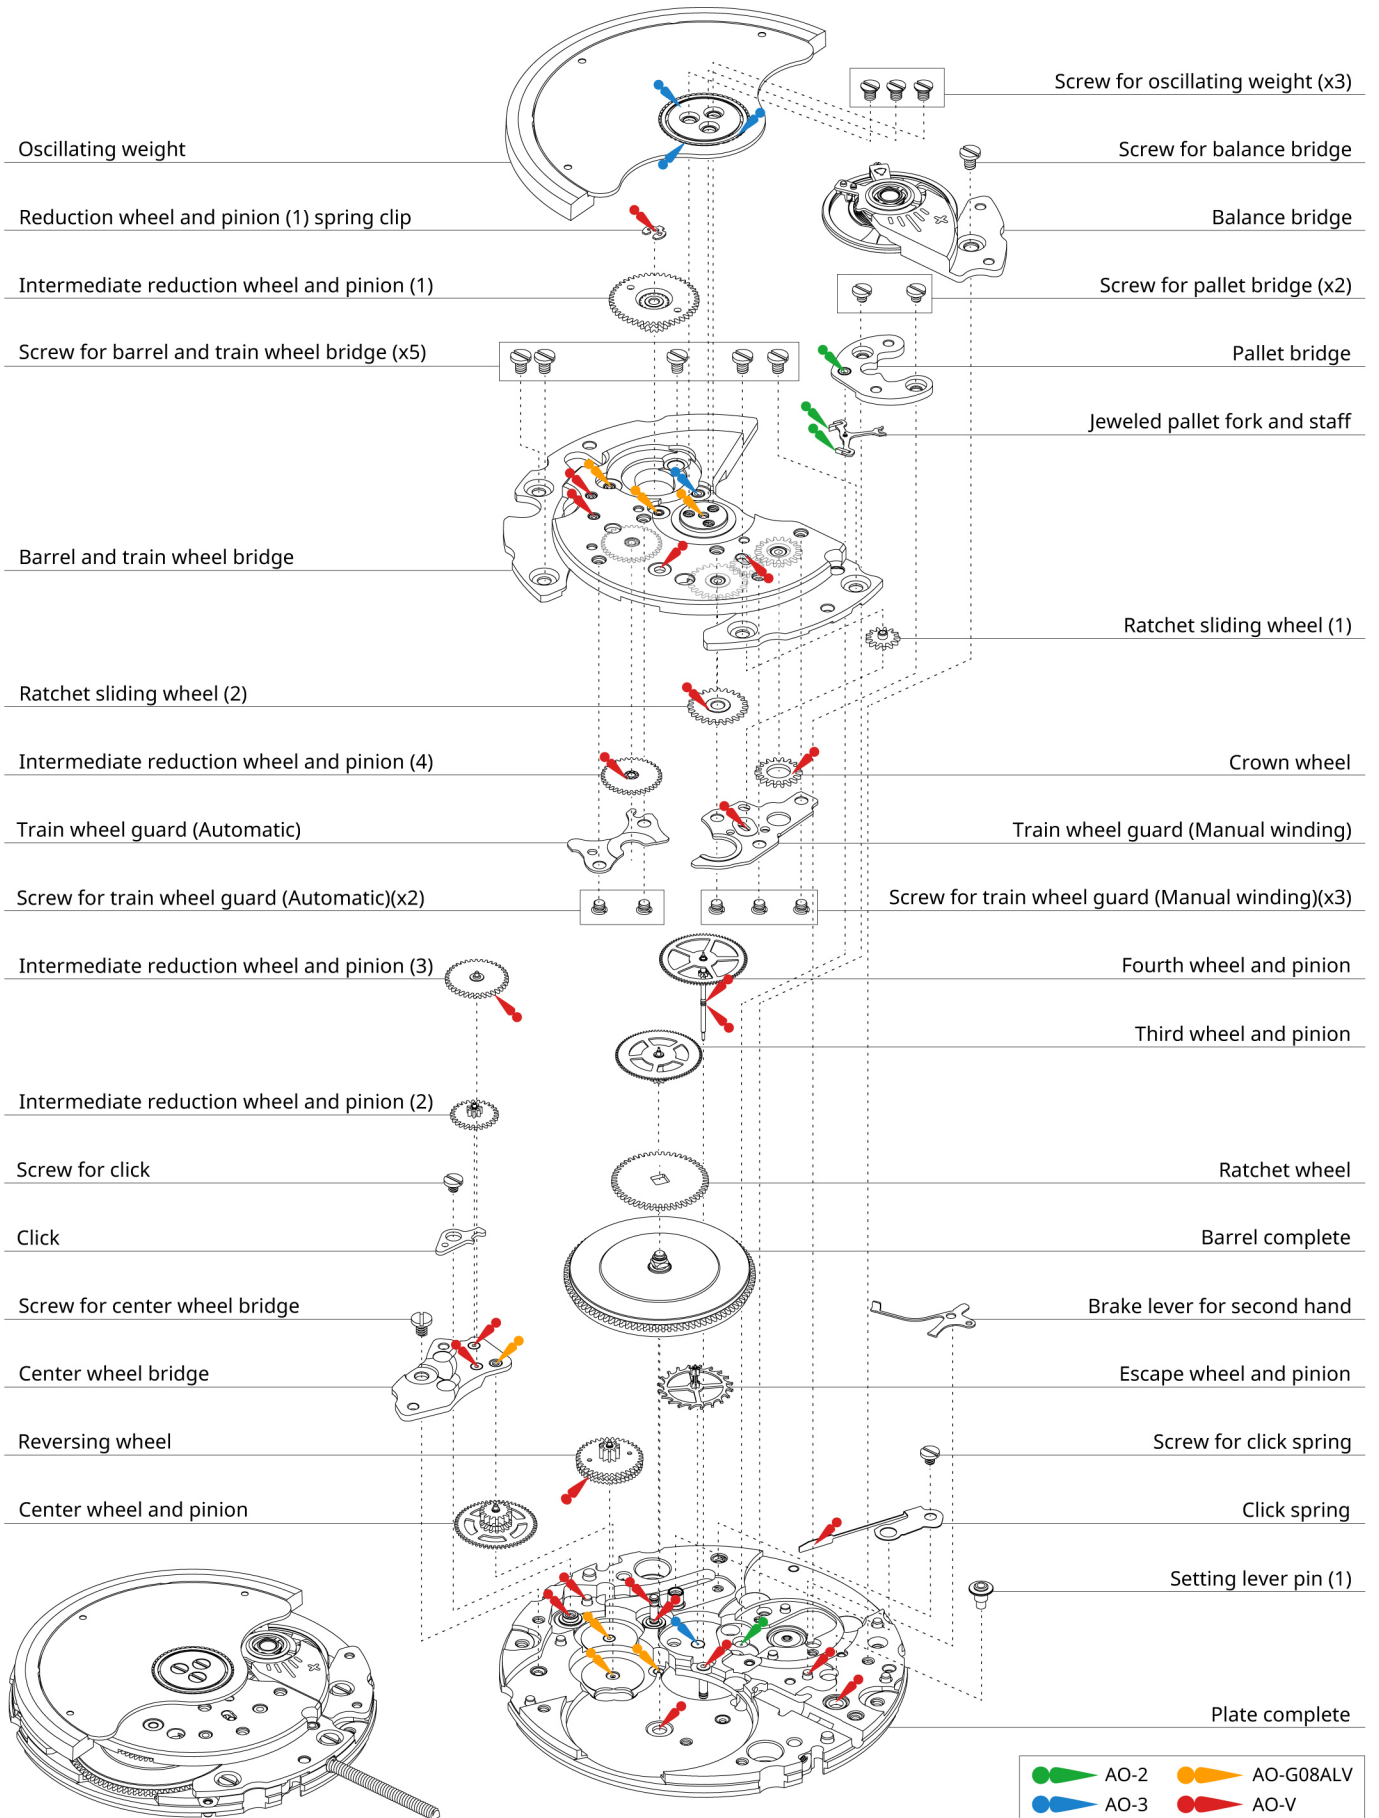

Assembly - Disassembly chart for Cal. 9075

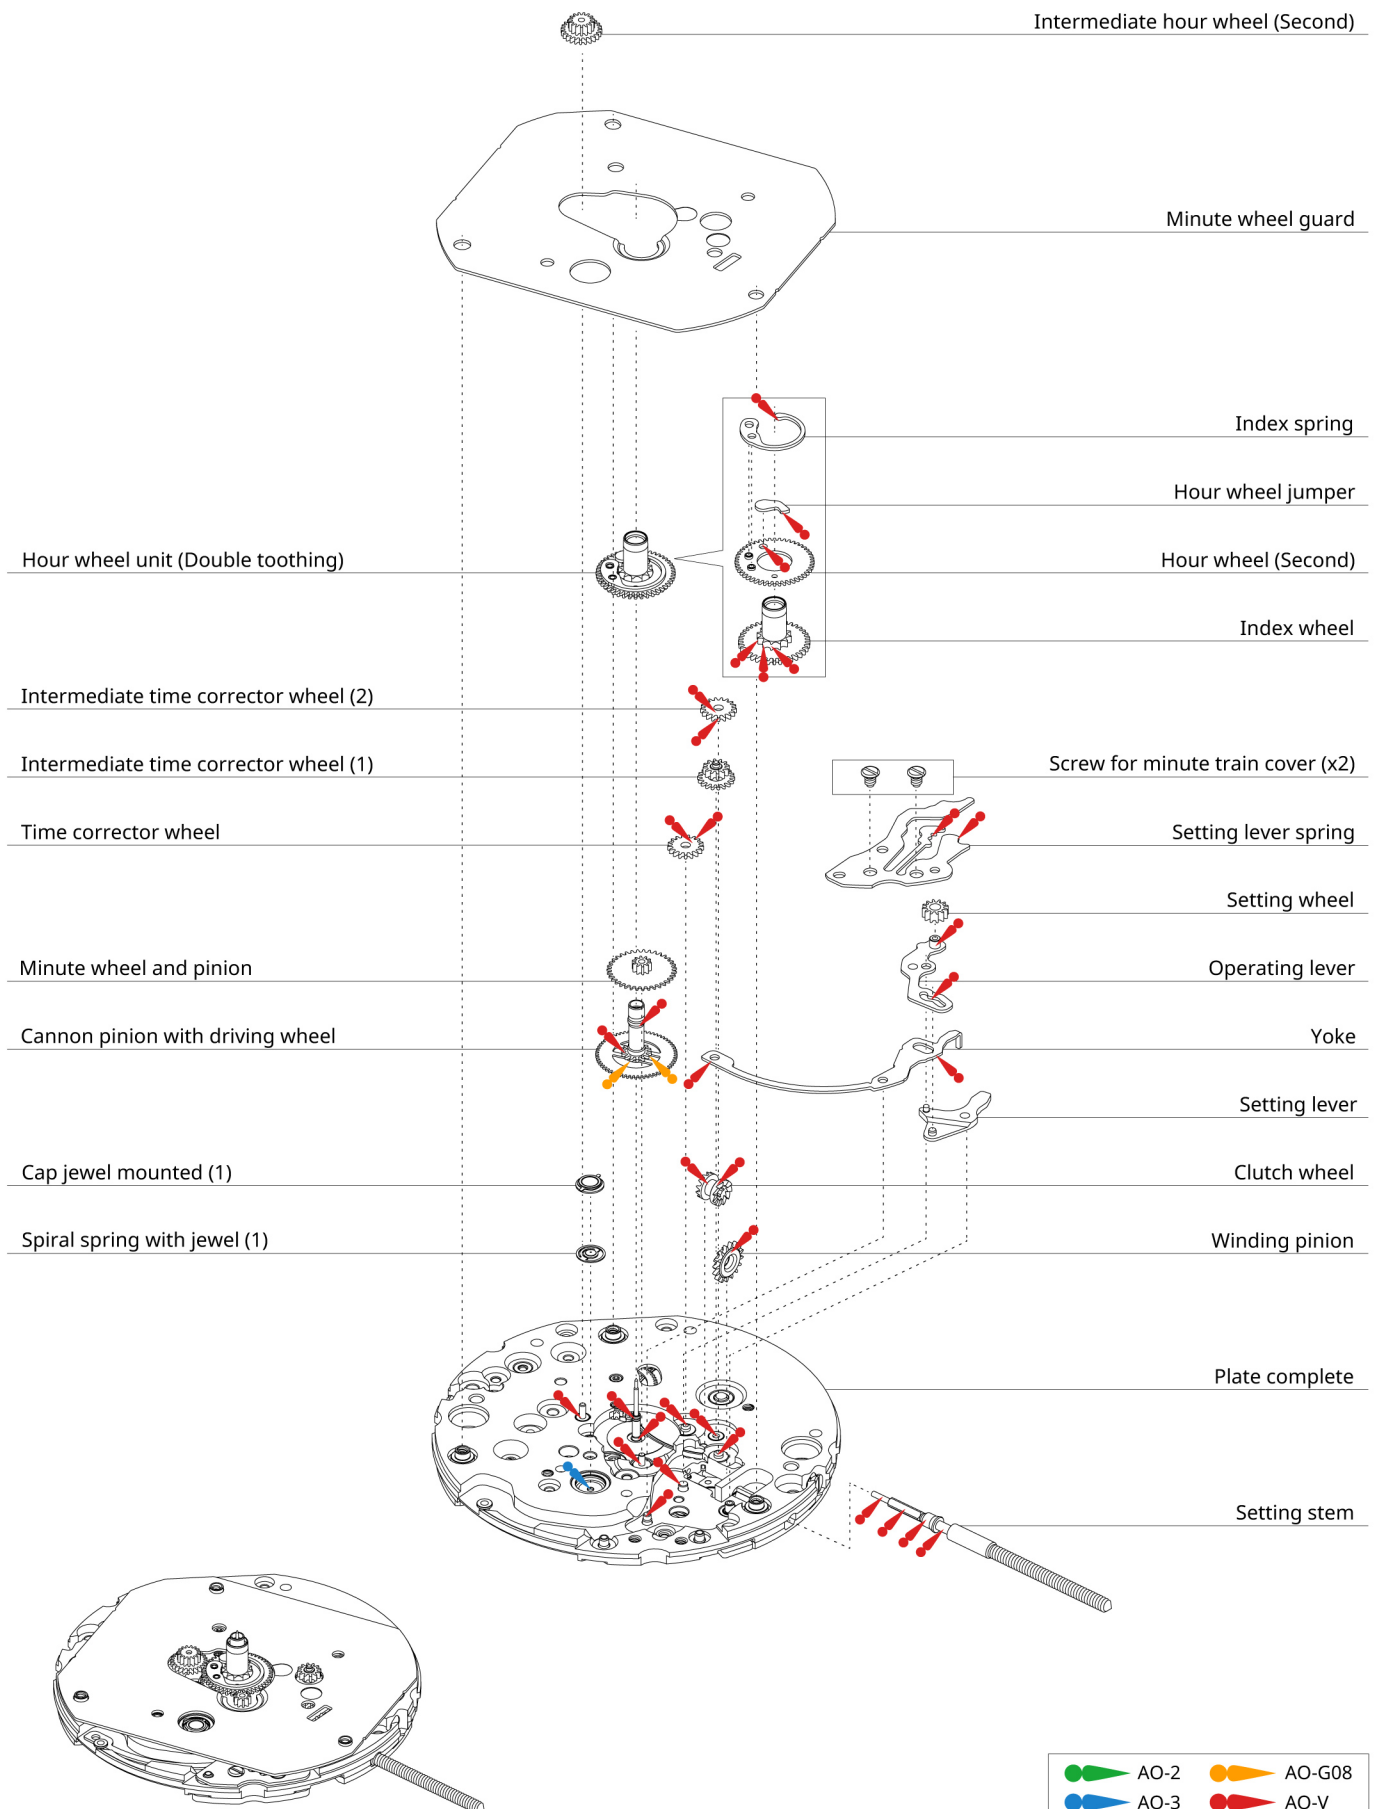



Assembly - Disassembly chart for Cal. 9075

